

KOREA STANDARD

LED Converter Manufacturer



LED CONVERTER

Slim type converter

Waterproof converter

ENCLOSED SWITCHING POWER SUPPLY

Slim & Low Power Consumption Type

Slim & Low Cost Type

General Type

OTHERS

I About Us

We have grown to the provider of the total solution in the field of electric power and electronic parts by developing and manufacturing various reliable SMPS, SSR, Noise Filter using all our employees creativity, passion and ability to rise to challenge.

We have done tremendous efforts for our customers to use SMPS, SSR, Noise Filter with high reliability and high efficiency in the field of indoor and outdoor LED lighting, communication, industrial field, electric sign board, broadcasting, electric system, banking, medical equipment etc.

We will also cope with developing and manufacturing SMPS of customized specification for the satisfaction of various and changing requirements of customers very quickly and production of small quantity with various kinds.





Quick Selection Chart for LED Converter

C.V / C.C	Indoor / Outdoor	Case	PFC	Series Name	Input(VAC)	Output(VDC)	Potted	IP	Slim Type	OTP	Dimming	Vo/Io Adj	Warranty	Page
C.V.	Outdoor	Metal	Non-PFC	UP-W2LM/UP-W2LF	180~264	12/24(LM)/12(LF)	●	68	Normal	● 200~400W	—	—	3	9
				UP-W2L	180~264	12/24	●	68	Normal	● 300~500W	—	—	2	10
				UP-W2C	160~277	12/24	●	68	Normal	●	—	—	5	11
				UP-W2SC	160~277	12/24	●	68	Normal	—	—	—	3	12
				UP-W2(V1)	160~277	12/24	●	68	Normal	●	—	—	3	13
				UP-W2S	160~277	12	●	68	Normal	●	—	—	2	14
				UP-WQ	90~277	12/24	●	68	Normal	●	—	—	3	15
				UP(F)-WH	90~305	12/24(100W)	●	68	Normal	●	—	—	5	16
				UP(F)-MH	90~305	12	●	68	Normal	●	—	—	5	17
				UP-TH	90~305	12	●	68	Normal	●	—	—	5	17
				UP-W1	90~132	12	●	68	Normal	●	—	—	3	19
			PFC(180W)	UP(F)-MH	90~305	12	●	68	Normal	●	—	—	5	17
		PFC	PFC	UPF-MC	120~277	12/24	●	66	Slim	●	—	—	5	18
				UPF-MK	180~264	12/24	●	66	Slim	●	—	—	5	18
				UPF-WQ	90~305	12/24	●	68	Normal	●	—	—	3	20
				UPF-WQ2	160~305	12	●	68	Normal	—	—	—	3	21
				UPF-CQH	90~305	12	●	68	Normal	●	—	—	5	22
				UPF-CQ2	90~160 160~305	12	●	68	Normal	●	—	—	5	24
		Plastic	PFC	UP(F)-WH	90~305	12	●	68	Normal	●	—	—	5	16
				UP-W1	90~132	12	●	68	Normal	—	—	—	3	19
			Non-PFC	UP-W2(V1)	160~277	12/24	●	68	Normal	—	—	—	3	13
				UP-WQ	90~277	12/24	●	68	Normal	● 150~300W	—	—	3	15
C.V.+C.C.	Outdoor	Metal	Non-PFC	UP-LHE/UP-E	90~264	5/12/24	—	—	Slim	—	—	—	3/2	35
				UP-AF/UP-G	176~264	5(AF)/12/24(G)	—	—	Slim	—	—	—	2	36
				UP	85~264	5/12/15/24	—	—	Normal	—	—	—	3	37
		Plastic	Non-PFC	UP-F	90~264	12/24	●	62	Slim	—	—	—	3	6
				UP-W2F	160~277	12/24	●	62	Slim	—	—	—	3	7
		Metal	PFC	UPF-CQH	90~305	24/36/48	●	68	Normal	● 40~250W	—	●	5	22
				UPF-CQ2	90~160 160~305	36/48	●	68	Normal	● 100~240W	—	●	5	24
				UPF-CQH-D	90~305	24/36/48	●	68	Normal	● 40~250W	●	●	5	23
				UPF-CQ2D	90~160 160~305	36/48	●	68	Normal	● 100~240W	●	●	5	25
				UPF-CP2(D)	180~264	36/48 150/250	●	68	Normal	● 120~600W	●	●	5	26
				UPF-CQ2DP	160~305	36/48	●	68	Normal	—	●	●	5	27
				UPF-C7	180~264	30/60/90/120 150/180/240	●	68	Normal	● 80~200W	●	●	5	28
				UPF-C7D	180~264	30/60/90/120 150/180/240	●	68	Normal	● 80~200W	●	●	5	29
				UPF-CQ2[D,T,F]	180~264	33/90/120	●	68	Normal	— ● 150~200W	●	●	5	30
				UPF-CQH-D-EX	90~305	36	●	68	Normal	● 50~250W	●	●	5	31
		Plastic	PFC	UPF-CH2(D) UPF-CG2(D)	180~264	20/24/30	●	68	Normal	● 50~250W	●	●	5	32
				UPF-CH2D-EX UPF-CG2D-EX	180~264	20/24/30	●	68	Normal	● 50~250W	●	●	5	33
C.C.	Outdoor	Metal	PFC	UPF-NI / MZ	180~264	90	—	42	Normal	—	—	—	3	5

Contents

LED Converter

Indoor Light converter

UPF-NI /MZ	C.C. mode with PFC/180~264Vac/10W~20W	05
------------	---------------------------------------	----

Slim Type converter

UP-F	C.V. mode /90~264Vac/Slim design/30W	06
------	--------------------------------------	----

UP-W2F	C.V. mode /160~277Vac/Slim design/30W~60W	07
--------	---	----

Waterproof converter

UP-W2LM/W2LF	C.V. mode /180~264Vac/Economic Metal case/60W~400W	09
--------------	--	----

UP-W2L	C.V. mode /180~264Vac/Economic Plastic & Metal case/60W~500W	10
--------	--	----

UP-W2C	C.V. mode /160~277Vac/Max. power based on output/Compact Metal/100W~300W	11
--------	--	----

UP-W2SC	C.V. mode /160~277Vac/Max. power based on input/Compact Metal/100W~300W	12
---------	---	----

UP-W2(V1)	C.V. mode /160~277Vac/Max. power based on output/10W~300W	13
-----------	---	----

UP-W2S	C.V. mode /160~277Vac/Max. power based on input/Economic/100W~300W	14
--------	--	----

UP-WQ	C.V. mode /90~277Vac/Wide input/8W~150W	15
-------	---	----

UP(F)-WH	C.V. mode /90~305Vac/UL Approved/60W~150W	16
----------	---	----

UP(F)-MH	C.V. mode /90~305Vac/UL Approved/120W~180W	17
----------	--	----

UP-TH	C.V. mode with Threaded terminal/90~305Vac/Listed UL Approved/60W	17
-------	---	----

UPF-MC	C.V. mode with PFC/120~277Vac/Micro Slim design/UL Approved/60W	18
--------	---	----

UPF-MK	C.V. mode with PFC/180~264Vac/Micro Slim design/60W	18
--------	---	----

UP-W1	C.V. mode/90~132Vac/UL Approved/40W~150W	19
-------	--	----

Waterproof with PFC converter

UPF-WQ	C.V. mode with PFC/90~305Vac/100W~300W	20
--------	--	----

UPF-WQ2	C.V. mode with PFC/160~305Vac/80W~300W	21
---------	--	----

UPF-CQH	C.V.+C.V. mode with PFC/90~305Vac/30W~250W	22
---------	--	----

UPF-CQHD	C.C. mode with PFC/90~305Vac/Dimming function/30W~250W	23
----------	--	----

UPF-CQ2	C.V. & C.C mode with PFC/90~160Vac/160~305Vac/60W~240W	24
---------	--	----

UPF-CQ2D	C.C mode with PFC/90~160Vac/160~305Vac/Dimming function/60W~240W	25
----------	--	----

UPF-CP2(D)	C.C mode with PFC/180~264Vac/50W~600W	26
------------	---------------------------------------	----

UPF-CQ2DP	C.C mode with PFC/160~305Vac/Dimming function/60W~500W	27
-----------	--	----

UPF-C7	C.C mode with PFC/180~264Vac/30W~200W	28
--------	---------------------------------------	----

UPF-C7D	C.C mode with PFC/180~264Vac/Dimming function/30W~200W	29
---------	--	----

UPF-CQ2[D,T,F]	C.C mode with PFC/180~264Vac/2~4ch output/50W~200W	30
----------------	--	----

UPF-CQHD-EX	C.C. mode with PFC/90~305Vac/Dimming function/30W~250W	31
-------------	--	----

UPF-CH2(D)	C.C. mode with PFC/180~264Vac/Dimming function/20W~250W	32
------------	---	----

UPF-CG2(D)	C.C. mode with PFC/180~264Vac/Dimming function/60W~200W	32
------------	---	----

UPF-CH2D-EX/CG2D-EX	C.C. mode with PFC/180~264Vac/Dimming function/20W~250W	33
---------------------	---	----

Enclosed Switching Power Supply

Slim & Low Power Consumption Type

UP-LHE/UP-E	C.V. mode/90~264Vac/Slim & Low power consumption/15W~1000W	35
-------------	--	----

Slim & Low Cost Type

UP-AF /UP-G	C.V. mode/176~264Vac/Slim & Low cost /100W~350W	36
-------------	---	----

General Type

UP	C.V. mode/85~264Vac & selectable by switch/15W~1500W	37
----	--	----

Others		38
--------	--	----

Key product features



Compliant with IEC 61347



Compliant with UL879



High durability



Dimming



Protection functions



Waterproof



High efficiency



Power factor



Long life time



Slim design



High heat radiation

UPF-NI • MZ



- Constant current design
- Built-in PFC function(UPF-NI)
- Protections : Over voltage/Short circuit
- IP42 design for indoor installations
- 100% full load burn-in test
- Suitable for LED fluorescent light and office light applications
- Plastic case
- 3years warranty

- AC input voltage range : 180~264VAC
- DC adjustment range : Fixed
- Over load protection : over 110% of rating, auto-recovery
- Over voltage protection : 115-150% rated output voltage
- Working temperature : -20~+50°C
- (refer to output derating curve of homepage)
- Safety standards : K61347-1,K61347-2-13
- EMC standards : K00015,K61547

KEY PRODUCT FEATURES



TECHNICAL DATA

W	VAC	VDC
10W~20W	AC180~264V	90V
IP	TA	PFC
IP 42	-20~+50°C	≥0.9 (90NI)

WARRANTY




APPROVALS



Protections			
Over load	Over voltage	Short circuit	Over temp.
	✓	✓	

Model	Packing
UPFxxS90NI	200
MZ-20S200-xx	200

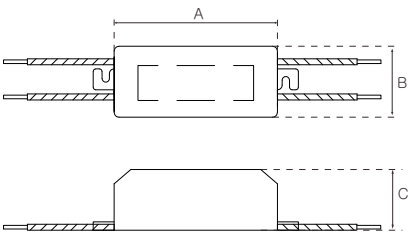

Model No.	Input Voltage	Output Voltage	C.C region	Output Current	Efficiency	Max. Power	Approvals	Dimensions [AxBxC]/Weight
UPF10S90NI	AC180~264V	90V	70V~90V	0.12A	90%	10W	KC/KS	86.2x29.8x25.5/0.046kg
UPF15S90NI	AC180~264V	90V	70V~90V	0.18A	91%	14W	KC/KS	86.2x29.8x25.5/0.046kg
UPF20S90NI	AC180~264V	90V	70V~90V	0.20A	92%	18.5W	KC/KS	86.2x29.8x25.5/0.046kg
MZ-20S200-17	AC180~264V	90V	70V~90V	0.17A	91%	20W	KC	86.2x29.8x25.5/0.046kg
MZ-20S200-20	AC180~264V	90V	70V~90V	0.2A	91%	15W	KC	86.2x29.8x25.5/0.046kg



UP-F



- Constant voltage design
- Wide input voltage range
- Protections : Over load/Over voltage/Short circuit
- Cooling by free air convection
- IP62 design for indoor installations
- 100% full load burn-in test
- Suitable for LED indoor lighting and LED electrical display applications
- Plastic case
- 3years warranty


- AC input voltage range : 90~264VAC
- DC adjustment range : Fixed
- Over load protection : over 110% of rating, auto-recovery
- Over voltage protection : 115-140% rated output voltage
- Withstanding voltage : I-O : 3KVAC,1 minute
- Isolation resistance : I-O : 100 M ohms/500VDC
- Working temperature : -30~+70°C
- (refer to output derating curve of homepage)
- Safety standards : EN61347-1,EN61347-2-13/K61347-1,K61347-2-13
- EMC standards : EN61000-3-2,3,EN61204-3/EN55022/K00015,K61547

KEY PRODUCT FEATURES



Protections			
Over load	Over voltage	Short circuit	Over temp.
✓	✓	✓	

Model	Packing
UP30SxxF	100

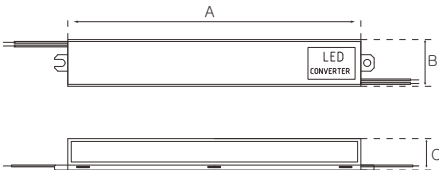

TECHNICAL DATA

W	VAC	VDC
30W	AC90~264V	12V/24V
IP	TA	PFC
IP 62	-30~+70°C	≤0.6

WARRANTY



APPROVALS



Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	Approvals	Dimensions [AxBxC]/Weight
UP30S12F	AC90~264V	12V	2.5A	83%	30W	KC/CE/CB/BIS	193.4x28.3x19/0.13kg
UP30S24F	AC90~264V	24V	1.25A	83%	30W	KC/CE/CB	193.4x28.3x19/0.13kg



UP-W2F



- Constant voltage design
- Protections : Over load/Over voltage/Short circuit
- Cooling by free air convection
- IP62 design for indoor installations
- 100% full load burn-in test
- Suitable for LED indoor lighting and LED electrical display applications
- Plastic case
- 3years warranty

- AC input voltage range : 160~277VAC
- DC adjustment range : Fixed
- Over load protection : over 110% of rating, auto-recovery
- Over voltage protection : 115-140% rated output voltage
- Withstanding voltage : I-O : 3KVAC,1minute
- Isolation resistance : I-O : 100 M ohms/500VDC
- Working temperature : -40~+50°C
- (refer to output derating curve of homepage)
- Safety standards : EN61347-1,EN61347-2-13/K61347-1,K61347-2-13
- EMC standards : EN61000-3-2,3,EN61547/EN55015/K00015,K61547

KEY PRODUCT FEATURES



Protections

Over load	Over voltage	Short circuit	Over temp.
✓	✓	✓	

TECHNICAL DATA

W	VAC	VDC
30W/60W	AC160~277V	12V/24V
IP	TA	PFC
IP 62	-40~+50°C	≤0.6


WARRANTY



APPROVALS



Model	Packing
UP30SxxW2F	100
UP60SxxW2F	100

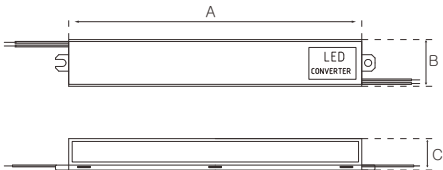

Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	Approvals	Dimensions [AxBxC]/Weight
UP30S12W2F	AC160~277V	12V	2.5A(1.87A@50°C)	83%	30W	KC/CE/CB	193.4x28.3x19/0.13kg
UP30S24W2F	AC160~277V	24V	1.25A(1.25A@50°C)	83%	30W	KC/CE/CB	193.4x28.3x19/0.13kg
UP60S12W2F	AC160~277V	12V	5A(3.75A@50°C)	86%	60W	KC/CE/CB	202x29.8x23.2/0.18kg
UP60S24W2F	AC160~277V	24V	2.5A(1.87A@50°C)	87%	60W	KC/CE/CB	202x29.8x23.2/0.18kg



LED Converter

- Waterproof converter
- Waterproof with PFC converter



UP-W2LM•W2LF



- Constant voltage design
- Protections : Over load/Over voltage/Short circuit /Over temperature(W2LF)
- Cooling by free air convention
- IP68 design for outdoor installations
- 100% full load burn-in test
- Suitable for LED lighting and moving sign applications
- Metal case
- 3years warranty

- AC input voltage range : 180~264VAC(refer to static characteristics curve of homepage)
- DC adjustment range : Fixed, can be modified within±5% rated output voltage(but, do not use over the rated power)
- Over load protection : over 110% of rating, auto-recovery
- Over voltage protection : 115-140% rated output voltage
- Withstanding voltage : I-O : 3KVAC, I-FG: 1.5KVAC, O-FG: 0.5KVAC, 1 minute
- Isolation resistance : I-O, I-FG, O-FG : 100 M ohms/500VDC
- Working temperature : -40~+70°C
- (refer to output derating curve of homepage)
- Safety standards : EN61347-1, EN61347-2-13/K61347-1, K61347-2-13
- EMC standards : EN61000-3-2,3, EN61204-3/EN55022/K00015, K61547


KEY PRODUCT FEATURES



Protections

Over load	Over voltage	Short circuit	Over temp.
✓	✓	✓	✓ (W2LF)

Model	Packing
UP60SxxW2LM	28
UP100SxxW2LM	28
UP150SxxW2LM	18
UP200SxxW2LF	15
UP300SxxW2LF	15
UP400SxxW2LF	15

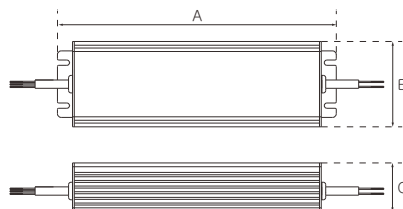

TECHNICAL DATA

W	VAC	VDC
60W~400W	AC180~264V	12V/24V
IP	TA	PFC
IP 68	-40~+70°C	≤0.6

WARRANTY



APPROVALS



UP-W2LM

Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	Approvals	Dimensions [AxBxC]/Weight
UP60S12W2LM	AC180~264V	12V	5A	92%	60W	CE/CB/EER	194x40x24.8/0.21kg
UP60S24W2LM	AC180~264V	24V	2.5A	92%	60W	CE/CB/EER	194x40x24.8/0.21kg
UP100S12W2LM	AC180~264V	12V	8.3A	91%	100W	KC/CE/CB/EER	194x40x24.8/0.21kg
UP100S24W2LM	AC180~264V	24V	4.2A	92%	100W	KC/CE/CB/EER	194x40x24.8/0.21kg
UP150S12W2LM	AC180~264V	12V	12.5A	91%	150W	KC/CE/CB/EER	156x48.1x36.8/0.49kg
UP150S24W2LM	AC180~264V	24V	6.25A	92%	150W	KC/CE/CB/EER	156x48.1x36.8/0.49kg

UP-W2LF

Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	OTP	Approvals	Dimensions [AxBxC]/Weight
UP200S12W2LF	AC180~264V	12V	16.6A	91%	200W	Built-in	CE/CB/EER	192.3x61.5x37.1/0.69kg
UP300S12W2LF	AC180~264V	12V	25A	91%	300W	Built-in	CE/CB/EER	222x74x49/1.45kg
UP400S12W2LF	AC180~264V	12V	33.3A	92%	400W	Built-in	CE/CB/EER	257x74x49/1.54kg

UP-W2L



Constant voltage design

Protections : Over load/Over voltage/Short circuit
/Over temperature(Metal type)
Cooling by free air convection
IP68 design for outdoor installations
100% full load burn-in test
Suitable for LED lighting and moving sign applications
Plastic case(60W~150W)
Metal case
2years warranty

AC input voltage range : 180~264VAC(refer to static characteristics curve of homepage)

DC adjustment range : Fixed, can be modified within $\pm 5\%$ rated output voltage(but, do not use over the rated power)
Over load protection : over 110% of rating, auto-recovery
Over voltage protection : 115-140% rated output voltage
Withstanding voltage :
I-O : 3KVAC, I-FG: 1.5KVAC, O-FG: 0.5KVAC, 1 minute
Isolation resistance : I-O, I-FG, O-FG : 100 M ohms/500VDC
Working temperature : $-40\sim+70^{\circ}\text{C}$
(refer to output derating curve of homepage)
Safety standards : EN61347-1, EN61347-2-13/K61347-1, K61347-2-13
EMC standards : EN61000-3-2,3, EN61204-3/EN55022/K00015, K61547


KEY PRODUCT FEATURES



Protections

Over load	Over voltage	Short circuit	Over temp.
✓	✓ (200W except)	✓	✓ (Metal type)

Model	Packing
UP60SxxW2L	100
UP100SxxW2L	100
UP150SxxW2L	58
UP200SxxW2L	28
UP300SxxW2L	15
UP400SxxW2L	15
UP500SxxW2L	15

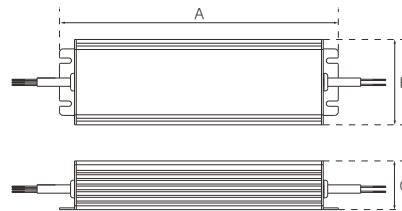

TECHNICAL DATA

W	VAC	VDC
60W~500W	AC180~264V	12V/24V
IP	TA	PFC
IP 68	$-40\sim+70^{\circ}\text{C}$	≤ 0.6

WARRANTY



APPROVALS



UP-W2L(Plastic Case)

Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	Approvals	Dimensions [AxBxC]/Weight
UP60S12W2L	AC180~264V	12V	5A	92%	60W	KC/CE/CB/EER	192x34.5x22/0.19kg
UP60S24W2L	AC180~264V	24V	2.5A	92%	60W	KC/CE/CB/EER	192x34.5x22/0.19kg
UP100S12W2L	AC180~264V	12V	8.3A(7.1A@50°C)	91%	100W	KC/CE/CB/EER	192x34.5x22/0.19kg
UP100S24W2L	AC180~264V	24V	4.2A(3.6A@50°C)	93%	100W	KC/CE/CB/EER	192x34.5x22/0.19kg
UP150S12W2L	AC180~264V	12V	11.5A(10A@50°C)	93%	138W	KC/CE/CB/EER	170.5x42x35/0.33kg
UP150S24W2L	AC180~264V	24V	5.8A(5.0A@50°C)	94%	138W	KC/CE/CB/EER	170.5x42x35/0.33kg

UP-W2L(Metal Case)

Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	OTP	Approvals	Dimensions [AxBxC]/Weight
UP200S12W2L	AC180~264V	12V	15A(13.3A@50°C)	91%	180W	-	KC/CE/CB/EER	173x55.5x37.3/0.53kg
UP200S24W2L	AC180~264V	24V	7.5A(6.7A@50°C)	92%	180W	-	KC/CE/CB/EER	173x55.5x37.3/0.53kg
UP300S12W2L	AC180~264V	12V	21.5A(18.8A@50°C)	91%	258W	Built-in	KC/CE/CB/EER	192.3x61.5x37.1/0.69kg
UP300S24W2L	AC180~264V	24V	11A(9.4A@50°C)	92%	258W	Built-in	KC/CE/CB/EER	192.3x61.5x37.1/0.69kg
UP400S12W2L	AC180~264V	12V	30A(25A@50°C)	91%	360W	Built-in	KC/CE/CB/EER	222x74x49/1.45kg
UP400S24W2L	AC180~264V	24V	15A(12.5A@50°C)	92%	360W	Built-in	KC/CE/CB/EER	222x74x49/1.45kg
UP500S12W2L	AC180~264V	12V	37.5A(31A@50°C)	91%	450W	Built-in	KC	257x74x49/1.54kg
UP500S24W2L	AC180~264V	24V	18.7A(15.5A@50°C)	93%	450W	Built-in	KC	257x74x49/1.54kg

UP-W2C



- Constant voltage design
- Protections : Over load/Over voltage/Short circuit /Over temperature
- Cooling by free air convention
- IP68 design for outdoor installations
- 100% full load burn-in test
- Suitable for LED lighting and moving sign applications
- Metal case
- 5years warranty

- AC input voltage range : 160~277VAC
- DC adjustment range : Fixed, can be modified within $\pm 5\%$ rated output voltage (but, do not use over the rated power)
- Over load protection : over 110% of rating, auto-recovery
- Over voltage protection : 115-140% rated output voltage
- Withstanding voltage :
I-O : 3KVAC, I-FG: 1.5KVAC, O-FG: 0.5KVAC, 1 minute
- Isolation resistance : I-O, I-FG, O-FG : 100 M ohms/500VDC
- Working temperature : -40~+70°C
(refer to output derating curve of homepage)
- Safety standards : EN61347-1, EN61347-2-13
- EMC standards : EN61000-3-2, 3, EN61204-3/EN55022


KEY PRODUCT FEATURES



Protections

Over load	Over voltage	Short circuit	Over temp.
✓	✓	✓	✓

Model	Packing
UP100SxxW2C	18
UP150SxxW2C	18
UP200SxxW2C	15
UP300SxxW2C	15

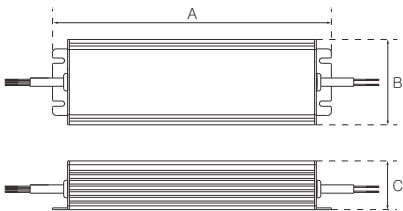

TECHNICAL DATA

W	VAC	VDC
100W~300W	AC160~277V	12V/24V
IP	TA	PFC
IP 68	-40~+70°C	≤ 0.6

WARRANTY



APPROVALS



Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	OTP	Approvals	Dimensions [AxBxC]/Weight
UP100S12W2C	AC160~277V	12V	8.3A(8.3A@50°C)	85%	100W	Built-in	CE/CB	203x48.1x36.8/0.60kg
UP100S24W2C	AC160~277V	24V	4.2A(4.2A@50°C)	87%	100W	Built-in	CE/CB	203x48.1x36.8/0.60kg
UP150S12W2C	AC160~277V	12V	12.5A(11A@50°C)	86%	150W	Built-in	CE/CB	218x55.5x37.3/0.68kg
UP150S24W2C	AC160~277V	24V	6.3A(5.5A@50°C)	87%	150W	Built-in	CE/CB	218x55.5x37.3/0.68kg
UP200S12W2C	AC160~277V	12V	16.6A(16.6A@50°C)	88%	200W	Built-in	CE/CB	233x61.5x37.1/0.93kg
UP200S24W2C	AC160~277V	24V	8.3A(8.3A@50°C)	89%	200W	Built-in	CE/CB	233x61.5x37.1/0.93kg
UP300S12W2C	AC160~277V	12V	25A(20.7A@50°C)	88%	300W	Built-in	CE/CB	278x61.5x37.1/1.08kg
UP300S24W2C	AC160~277V	24V	12.5A(10.4A@50°C)	89%	300W	Built-in	CE/CB	278x61.5x37.1/1.08kg



UP-W2SC




- Constant voltage design
- Protections : Over load/Over voltage/Short circuit
- Cooling by free air convection
- IP68 design for outdoor installations
- 100% full load burn-in test
- Suitable for LED lighting and moving sign applications
- Metal case
- 3years warranty

- AC input voltage range : 160~277VAC
- DC adjustment range : Fixed, can be modified within±5% rated output voltage(but, do not use over the rated power)
- Over load protection : over 110% of rating, auto-recovery
- Over voltage protection : 115-140% rated output voltage
- Withstanding voltage :
I-O : 3KVAC,I-FG:1.5KVAC,O-FG:0.5KVAC,1minute
- Isolation resistance : I-O,I-FG,O-FG : 100 M ohms/500VDC
- Working temperature : -40~+70°C
(refer to output derating curve of homepage)
- Safety standards : EN61347-1,EN61347-2-13/K61347-1,K61347-2-13
- EMC standards : EN61000-3-2,3,EN61204-3/EN55022/K00015,K61547

Protections

Over load	Over voltage	Short circuit	Over temp.
✓	✓	✓	

Model	Packing
UP100SxxW2SC	18
UP150SxxW2SC	18
UP200SxxW2SC	18
UP300SxxW2SC	15

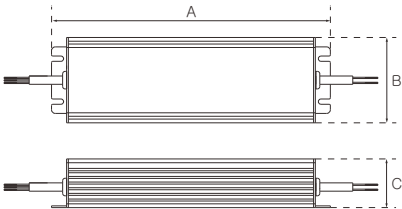

KEY PRODUCT FEATURES



TECHNICAL DATA

W	VAC	VDC
100W~300W	AC160~277V	12V/24V
IP	TA	PFC
IP 68	-40~+70°C	≤0.6

WARRANTY



APPROVALS



Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	Approvals	Dimensions [AxBxC]/Weight
UP100S12W2SC	AC160~277V	12V	7.1A(7.1A@50°C)	85%	85W	KC/CE/CB	193x48.1x36.8/0.55kg
UP100S24W2SC	AC160~277V	24V	3.6A(3.6A@50°C)	87%	85W	KC/CE/CB	193x48.1x36.8/0.55kg
UP150S12W2SC	AC160~277V	12V	10.8A(9.4A@50°C)	86%	130W	KC/CE/CB	208x55.5x37.3/0.64kg
UP150S24W2SC	AC160~277V	24V	5.4A(4.7A@50°C)	86%	130W	KC/CE/CB	208x55.5x37.3/0.64kg
UP200S12W2SC	AC160~277V	12V	15A(13.33A@50°C)	88%	180W	KC/CE/CB	220x61.5x37.1/0.82kg
UP200S24W2SC	AC160~277V	24V	7.5A(6.67A@50°C)	89%	180W	KC/CE/CB	220x61.5x37.1/0.82kg
UP300S12W2SC	AC160~277V	12V	20A(18.8A@50°C)	88%	240W	KC/CE/CB	260x61.5x37.1/0.98kg
UP300S24W2SC	AC160~277V	24V	10.5A(9.5A@50°C)	89%	252W	KC/CE/CB	260x61.5x37.1/0.98kg



UP-W2(V1)



- Constant voltage design
- Protections : Over load/Over voltage/Short circuit /Over temperature(Metal Type)
- Cooling by free air convection
- IP68 design for outdoor installations
- 100% full load burn-in test
- Suitable for LED lighting and moving sign applications
- Plastic case(10W~100W)
- Metal case(40W~300W)
- 3years warranty

- AC input voltage range : 160~277VAC
- DC adjustment range : Fixed, can be modified within $\pm 5\%$ rated output voltage(but, do not use over the rated power)
- Over load protection : over 110% of rating, auto-recovery
- Over voltage protection : 115-140% rated output voltage
- Withstanding voltage :
I-O : 3KVAC, I-FG: 1.5KVAC, O-FG: 0.5KVAC, 1 minute
- Isolation resistance : I-O, I-FG, O-FG : 100 M ohms/500VDC
- Working temperature : -40~+70°C
(refer to output derating curve of homepage)
- Safety standards : EN61347-1, EN61347-2-13
- EMC standards : EN61000-3-2,3, EN61204-3/EN55022

KEY PRODUCT FEATURES



TECHNICAL DATA

W	VAC	VDC
10W~300W	AC160~277V	12V/24V
IP	TA	PFC
IP 68	-40~+70°C	≤ 0.6

WARRANTY




APPROVALS



Protections

Over load	Over voltage	Short circuit	Over temp.
✓	✓	✓	✓ (Metal type)

Model	Packing
UP10SxxW2(V1)	154
UP20SxxW2(V1)	132
UP30SxxW2(V1)	132
UP40SxxW2(V1)	72
UP60SxxW2(V1)	58
UP100SxxW2(V1)P	28
UP40SxxW2(V1)M	18
UP60SxxW2(V1)M	18
UP80SxxW2(V1)	18
UP100SxxW2(V1)	18
UP150SxxW2(V1)	15
UP200SxxW2(V1)	15
UP300SxxW2(V1)	15

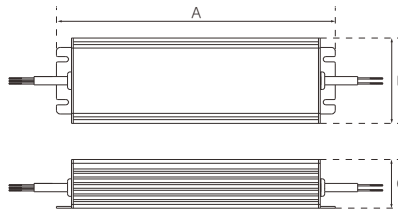

Plastic Case Type

Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	Approvals	Dimensions [AxBxC]/Weight
UP10S12W2(V1)	AC160~277V	12V	0.83A	81%	10W	CE/CB	126.5x35.5x23.5/0.08kg
UP10S24W2(V1)	AC160~277V	24V	0.41A	81%	10W	CE/CB	126.5x35.5x23.5/0.08kg
UP20S12W2(V1)	AC160~277V	12V	1.66A	82%	20W	KC/CE/CB	151.5x35.5x25.5/0.12kg
UP20S24W2(V1)	AC160~277V	24V	0.83A	82%	20W	KC/CE/CB	151.5x35.5x25.5/0.12kg
UP30S12W2(V1)	AC160~277V	12V	2.5A	83%	30W	KC/CE/CB	151.5x35.5x25.5/0.14kg
UP30S24W2(V1)	AC160~277V	24V	1.25A	84%	30W	KC/CE/CB	151.5x35.5x25.5/0.14kg
UP40S12W2(V1)	AC160~277V	12V	3.33A	83%	40W	KC/CE/CB/BIS	146.5x42x35/0.3kg
UP40S24W2(V1)	AC160~277V	24V	1.66A	85%	40W	KC/CE/CB	146.5x42x35/0.3kg
UP60S12W2(V1)	AC160~277V	12V	5A	83%	60W	KC/CE/CB/BIS	170.5x42x35/0.35kg
UP60S24W2(V1)	AC160~277V	24V	2.5A	85%	60W	KC/CE/CB	170.5x42x35/0.35kg
UP100S12W2(V1)P	AC160~277V	12V	8.33A	85%	100W	CE/CB	200x51.5x40/0.54kg

Metal Case Type

Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	OTP	Approvals	Dimensions [AxBxC]/Weight
UP40S12W2(V1)M	AC160~277V	12V	3.33A	84%	40W	Built-in	KC/CE/CB	171x48.1x36.8/0.4kg
UP40S24W2(V1)M	AC160~277V	24V	1.66A	86%	40W	Built-in	KC/CE/CB	171x48.1x36.8/0.4kg
UP60S12W2(V1)M	AC160~277V	12V	5A	84%	60W	Built-in	KC/CE/CB	171x48.1x36.8/0.4kg
UP60S24W2(V1)M	AC160~277V	24V	2.5A	86%	60W	Built-in	KC/CE/CB	171x48.1x36.8/0.4kg
UP80S12W2(V1)	AC160~277V	12V	6.66A	85%	80W	Built-in	KC/CE/CB	196x48.1x36.8/0.45kg
UP100S12W2(V1)	AC160~277V	12V	8.33A	85%	100W	Built-in	KC/CE/CB/BIS	210x56.7x41.3/0.7kg
UP100S24W2(V1)	AC160~277V	24V	4.16A	88%	100W	Built-in	KC/CE/CB	210x56.7x41.3/0.7kg
UP150S12W2(V1)	AC160~277V	12V	12.5A	85%	150W	Built-in	KC/CE/CB/BIS	212x74x45/0.9kg
UP150S24W2(V1)	AC160~277V	24V	6.25A	88%	150W	Built-in	KC/CE/CB	212x74x45/0.9kg
UP200S12W2(V1)	AC160~277V	12V	16.6A(12.49A@50°C)	85%	200W	Built-in	KC/CE/CB/BIS	233x74x45/1.1kg
UP200S24W2(V1)	AC160~277V	24V	8.33A(6.24A@50°C)	88%	200W	Built-in	KC/CE/CB	233x74x45/1.1kg
UP300S12W2(V1)	AC160~277V	12V	25A(18.75A@50°C)	85%	300W	Built-in	KC/CE/CB/BIS	282x74x49/1.45kg
UP300S24W2(V1)	AC160~277V	24V	12.5A(9.37A@50°C)	88%	300W	Built-in	KC/CE/CB	282x74x49/1.45kg

UP-W2S




- Constant voltage design
- Protections : Over load/Over voltage/Short circuit /Over temperature
- Cooling by free air convection
- IP68 design for outdoor installations
- 100% full load burn-in test
- Suitable for LED lighting and moving sign applications
- Metal case
- 2years warranty

- AC input voltage range : 160~277VAC
- DC adjustment range : Fixed, can be modified within±5% rated output voltage(but, do not use over the rated power)
- Over load protection : over 110% of rating, auto-recovery
- Over voltage protection : 115-140% rated output voltage
- Withstanding voltage : I-O : 3KVAC,I-FG:1.5KVAC,O-FG:0.5KVAC,1minute
- Isolation resistance : I-O,I-FG,O-FG : 100 M ohms/500VDC
- Working temperature : -40~+70°C (refer to output derating curve of homepage)
- Safety standards : EN61347-1,EN61347-2-13/K61347-1,K61347-2-13
- EMC standards : EN61000-3-2,3,EN61204-3/EN55022/K00015,K61547

Protections			
Over load	Over voltage	Short circuit	Over temp.
✓	✓	✓	✓

Model	Packing
UP100S12W2S	18
UP150S12W2S	18
UP200S12W2S	15
UP300S12W2S	15

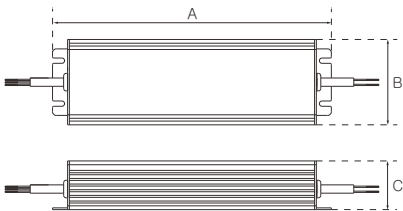

KEY PRODUCT FEATURES



TECHNICAL DATA

W	VAC	VDC
100W~300W	AC160~277V	12V
IP	TA	PFC
IP 68	-40~+70°C	≤0.6

WARRANTY



APPROVALS



Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	OTP	Approvals	Dimensions [AxBxC]/Weight
UP100S12W2S	AC160~277V	12V	7.1A	85%	85W	Built-in	KC/CE/CB/BIS	196x48.1x36.8/0.45kg
UP150S12W2S	AC160~277V	12V	10.8A	85%	130W	Built-in	KC/CE/CB/BIS	215x56.7x41.3/0.72kg
UP200S12W2S	AC160~277V	12V	13.3A(12.5A@50°C)	86%	160W	Built-in	KC/CE/CB/BIS	212x74x45/0.9kg
UP300S12W2S	AC160~277V	12V	20A(18.8A@50°C)	87%	240W	Built-in	KC/CE/CB/BIS	251x74x45/1.2kg



UP-WQ



- Constant voltage design
- Wide input voltage range
- Protections : Over load/Over voltage/Short circuit /Over temperature(Metal Type)
- IP68 design for outdoor installations(8W:IP42)
- 100% full load burn-in test
- Suitable for LED lighting and moving sign applications
- Plastic case(8W~60W)
- Metal case(100W~150W)
- 3years warranty

- AC input voltage range : 90~277VAC
- DC adjustment range : Fixed, can be modified within $\pm 10\%$ rated output voltage(but, do not use over the rated power)
- Over load protection : over 110% of rating, auto-recovery
- Over voltage protection : 115-140% rated output voltage
- Withstanding voltage : I-O : 3KVAC, I-FG:1.5KVAC, O-FG:0.5KVAC, 1 minute
- Isolation resistance : I-O, I-FG, O-FG : 100 M ohms/500VDC
- Working temperature : -40~+70°C (refer to output derating curve of homepage)
- Safety standards : EN61347-1, EN61347-2-13
- EMC standards : EN61000-3-2, 3, EN61204-3/EN55022

KEY PRODUCT FEATURES



TECHNICAL DATA

W	VAC	VDC
8W~150W	AC90~277V	12V/24
IP	TA	PFC
IP 68	-40~+70°C	≤ 0.6

WARRANTY




APPROVALS



Protections

Over load	Over voltage	Short circuit	Over temp.
✓	✓	✓	✓ (Metal type)

Model	Packing
UP8SxxWQ	200
UP12SxxWQ	154
UP16SxxWQ	154
UP20SxxWQ	132
UP25SxxWQ	132
UP35SxxWQ	72
UP40SxxWQ	72
UP60SxxWQ	58
UP100SxxWQ	18
UP150SxxWQ	15

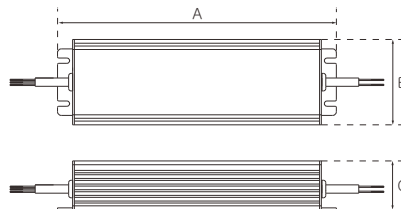

Plastic Case Type

Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	Approvals	Dimensions [AxBxC]/Weight
UP8S12WQ	AC90~277V	12V	0.67A	80%	8W	CE/CB	86.2x29.8x25.5/0.046kg
UP8S24WQ	AC90~277V	24V	0.33A	81%	8W	CE/CB	86.2x29.8x25.5/0.046kg
UP12S12WQ	AC90~277V	12V	1A	80%	12W	CE/CB	126.5x35.5x23.5/0.082kg
UP12S24WQ	AC90~277V	24V	0.5A	80%	12W	CE/CB	126.5x35.5x23.5/0.082kg
UP16S12WQ	AC90~277V	12V	1.34A	80%	16W	CE/CB	126.5x35.5x23.5/0.115kg
UP16S24WQ	AC90~277V	24V	0.67A	80%	16W	CE/CB	126.5x35.5x23.5/0.115kg
UP20S12WQ	AC90~277V	12V	1.67A	81%	20W	CE/CB	151.5x35.5x25.5/0.15kg
UP20S24WQ	AC90~277V	24V	0.84A	81%	20W	CE/CB	151.5x35.5x25.5/0.15kg
UP25S12WQ	AC90~277V	12V	2.08A	82%	25W	CE/CB	151.5x35.5x25.5/0.153kg
UP25S24WQ	AC90~277V	24V	1.04A	82%	25W	CE/CB	151.5x35.5x25.5/0.153kg
UP35S12WQ	AC90~277V	12V	2.9A	84%	35W	CE/CB	146.5x42x35/0.256kg
UP35S24WQ	AC90~277V	24V	1.46A	85%	35W	CE/CB	146.5x42x35/0.256kg
UP40S12WQ	AC90~277V	12V	3.33A	84%	40W	CE/CB	146.5x42x35/0.3kg
UP40S24WQ	AC90~277V	24V	1.66A	85%	40W	CE/CB	146.5x42x35/0.3kg
UP60S12WQ	AC90~277V	12V	5A	84%	60W	CE/CB	170.5x42x35/0.35kg
UP60S24WQ	AC90~277V	24V	2.5A	85%	60W	CE/CB	170.5x42x35/0.35kg

Metal Case Type

Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	OTP	Approvals	Dimensions [AxBxC]/Weight
UP100S12WQ	AC90~277V	12V	8.33A	84%	100W	Built-in	CE/CB	215x56.7x41.3/0.72kg
UP100S24WQ	AC90~277V	24V	4.16A	87%	100W	Built-in	CE/CB	215x56.7x41.3/0.72kg
UP150S12WQ	AC90~277V	12V	12.5A	84%	150W	Built-in	CE/CB	261x56.7x41.3/1kg
UP150S24WQ	AC90~277V	24V	6.25A	87%	150W	Built-in	CE/CB	261x56.7x41.3/1kg

UP(F)-WH



- Constant voltage design
- Wide input voltage range
- Built-in PFC function(150W)
- Protections : Over load/Over voltage/Short circuit /Over temperature
- Cooling by free air convection
- IP68 design for outdoor installations
- 100% full load burn-in test
- Dry, damp locations
- Suitable for LED lighting and moving sign applications
- Class 2 Power unit(60W/100W(24V))
- Plastic case(PWH)
- Metal case
- 5years warranty

- AC input voltage range : 90~305VAC
- DC adjustment range : Fixed, can be modified within±5% rated output voltage(but, do not use over the rated power)
- Over load protection : over 110% of rating, auto-recovery
- Over voltage protection : 115-140% rated output voltage
- Withstanding voltage :
- I-O : 3.75KVAC,I-FG:2KVAC,O-FG:1.5KVAC,1minute
- Isolation resistance : I-O,I-FG,O-FG : 100 M ohms/500VDC
- Working temperature : -40~+70°C
- (refer to output derating curve of homepage)
- Safety standards : UL879
- EMC standards : FCC Part 15 class B

KEY PRODUCT FEATURES

Protections

Over load	Over voltage	Short circuit	Over temp.
✓	✓	✓	✓



TECHNICAL DATA

W	VAC	VDC
60W~150W	AC90~305V	12V 12V/24V (100W)
IP	TA	PFC
IP 68	-40~+70°C	≤0.6 ≥0.9(150W)

WARRANTY



APPROVALS



Plastic Case Type

	Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	OTP	Approvals	Dimensions [AxBxC]/Weight
NEW	UP60S12PWH	AC90~305V	12V	5A Class 2 Power	87%	60W	Built-in	UL/FCC/PSE	170.5x42x35/0.33kg

Metal Case Type

	Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	OTP	Approvals	Dimensions [AxBxC]/Weight
	UP60S12WH	AC90~305V	12V	5A Class 2 Power	84%	60W	Built-in	UL/FCC/PSE	194x56.7x41.3/0.75kg
	UP100S12WH	AC90~305V	12V	8.3A	84%	100W	Built-in	UL/FCC/PSE	237x56.7x41.3/0.92kg
NEW	UP100S24WH	AC90~305V	24V	4.16A Class 2 Power	87%	100W	Built-in	UL/FCC/PSE	194x56.7x41.3/0.75kg
	UP120S12WH	AC90~305V	12V	10A	84%	120W	Built-in	UL/FCC/PSE	253x56.7x41.3/1kg
NEW	UPF150S12WH	AC90~305V	12V	12.5A	91%	150W	Built-in	UL/FCC/PSE	213x61.5x37.1/0.78kg



UP(F)-MH•TH



- Constant voltage design
- Wide input voltage range
- Built-in PFC function(180W)
- Protections : Over load/Over voltage/Short circuit /Over temperature
- Cooling by free air convection
- IP68 design for outdoor installations
- 100% full load burn-in test
- Dry, damp locations
- Dry, damp and wet locations(60W)
- 1/2" NPT threaded connector to simplify electrical wiring(60W)
- Suitable for LED lighting and moving sign applications
- Class 2 Power unit
- Metal case
- 5years warranty

- AC input voltage range : 90~305VAC
- DC adjustment range : Fixed, can be modified within $\pm 5\%$ rated output voltage(but, do not use over the rated power)
- Over load protection : over 110% of rating, auto-recovery
- Over voltage protection : 115-140% rated output voltage
- Withstanding voltage :
- I-O : 3.75KVAC,I-FG:2KVAC,O-FG:1.5KVAC,1minute
- Isolation resistance : I-O,I-FG,O-FG : 100 M ohms/500VDC
- Working temperature : -40~+70°C
- (refer to output derating curve of homepage)
- Safety standards : UL879
- EMC standards : FCC Part 15 class B

KEY PRODUCT FEATURES

Protections			
Over load	Over voltage	Short circuit	Over temp.
✓	✓	✓	✓



TECHNICAL DATA

W	VAC	VDC
120W/180W /60W(TH)	AC90 ~305V	12V
IP	TA	PFC
IP 68	-40~+70°C	≤ 0.6 ≥ 0.9 (180W)

WARRANTY



APPROVALS



UP(F)-MH

Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	OTP	Approvals	Dimensions [AxBxC]/Weight
UP120S12MH	AC90~305V	12V	5A*2 Class 2 Power (Dual outputs)	85%	120W	Built-in	UL/FCC	211x68x38.8/0.9kg
UPF180S12MH	AC90~305V	12V	5A*3 Class 2 Power (Triple outputs)	89%	180W	Built-in	UL/FCC	263x72x40.8/1.4kg

UP-TH

Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	OTP	Approvals	Dimensions [AxBxC]/Weight
UP60S12TH	AC90~305V	12V	5A Class 2 Power	84%	60W	Built-in	UL/FCC	197x56.7x42.3/0.75kg



UPF-MC•MK



- Constant voltage design
- Micro metal case design
- Built-in PFC function
- Protections : Over load/Over voltage/Short circuit /Over temperature
- Cooling by free air convection
- IP66 design for outdoor installations
- 100% full load burn-in test
- Suitable for LED lighting and moving sign applications
- Class 2 Power unit
- Metal case
- 5years warranty

- AC input voltage range : 120~277VAC(MC)/180~264(MK)
- DC adjustment range : Fixed, can be modified within±5% rated output voltage(but, do not use over the rated power)
- Over load protection : over 105% of rating, auto-recovery
- Over voltage protection : 115-140% rated output voltage
- Withstanding voltage : I-O : 1.6KVAC, 1 minute
- Isolation resistance : I-O : 100 M ohms/500VDC
- Working temperature : -30~+50°C (refer to output derating curve of homepage)
- (MC)Safety standards : UL879
- (MC)EMC standards : FCC Part 15 class B
- (MK)Safety standards : EN61347-1,EN61347-2-13/K61347-1, K61347-2-13
- (MK)EMC standards : EN55015,EN61000-3-2,3,EN61547/ K00015,K61547


KEY PRODUCT FEATURES

Protections

Over load	Over voltage	Short circuit	Over temp.
✓	✓	✓	✓



Model	Packing
UPF60SxxMC	100
UPF60SxxMK	100

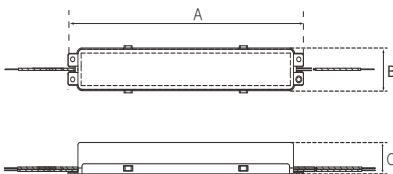

TECHNICAL DATA

W	VAC	VDC
60W	AC120~277V(MC) AC180~264V(MK)	12V/24V
IP	TA	PFC
IP 66	-30~+50°C	≥0.9

WARRANTY



APPROVALS



(MC)

(MC)

(MC)

(MC)

(MK)

(MK)

UPF-MC

	Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	OTP	Approvals	Dimensions [AxBxC]/Weight
NEW	UPF60S12MC	AC120~277V	12V	5A	Class 2 Power 90%	60W	Built-in	UL/FCC/PSE/CE/CB	174.8x27.5x20.2/0.17kg
	UPF60S24MC	AC120~277V	24V	2.5A	Class 2 Power 90%	60W	Built-in	UL/FCC/PSE/CE/CB	174.8x27.5x20.2/0.17kg

UPF-MK

	Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	OTP	Approvals	Dimensions [AxBxC]/Weight
NEW	UPF60S12MK	AC180~264V	12V	4.5A	90%	54W	Built-in	KS/KC	174.8x27.5x20.2/0.17kg
	UPF60S24MK	AC180~264V	24V	2.25A	90%	54W	Built-in	KS/KC	174.8x27.5x20.2/0.17kg



UP-W1




- Constant voltage design
- Protections : Over load/Over voltage/Short circuit /Over temperature(Metal Type)
- Cooling by free air convection
- IP68 design for outdoor installations
- 100% full load burn-in test
- Dry, damp locations
- Suitable for LED lighting and moving sign applications
- Class 2 Power unit(40W~60W)
- Plastic case(40W~60W)
- Metal case(100W~150W)
- 3years warranty

- AC input voltage range : 90~132VAC
- DC adjustment range : Fixed, can be modified within $\pm 5\%$ rated output voltage(but, do not use over the rated power)
- Over load protection : over 110% of rating, auto-recovery
- Over voltage protection : 115-140% rated output voltage
- Withstanding voltage :
I-O : 3KVAC, I-FG: 1.5KVAC, O-FG: 0.5KVAC, 1 minute
- Isolation resistance : I-O, I-FG, O-FG : 100 M ohms/500VDC
- Working temperature : $-40\sim+50^{\circ}\text{C}$
(refer to output derating curve of homepage)
- Safety standards : UL879

Protections

Over load	Over voltage	Short circuit	Over temp.
✓	✓	✓	✓ (Metal Type)

Model	Packing
UP40S12W1	72
UP60S12W1	58
UP100S12W1	18
UP150S12W1	15

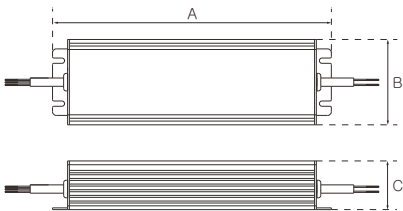

KEY PRODUCT FEATURES



TECHNICAL DATA

W	VAC	VDC
40W~150W	AC90~132V	12V
IP	TA	PFC
IP 68	$-40\sim+50^{\circ}\text{C}$	≤ 0.6

WARRANTY



APPROVALS



Plastic Case Type

Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	Approvals	Dimensions [AxBxC]/Weight
UP40S12W1	AC90~132V	12V	3.3A(2.49A@50°C)	Class 2 Power 82%	40W	UL	146.5x42x35/0.3kg
UP60S12W1	AC90~132V	12V	5A(3.75A@50°C)	Class 2 Power 82%	60W	UL	170.5x42x35/0.35kg

Metal Case Type

Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	OTP	Approvals	Dimensions [AxBxC]/Weight
UP100S12W1	AC90~132V	12V	8.4A(6.24A@50°C)	82%	100W	Built-in	UL	206x56.7x41.3/0.7kg
UP150S12W1	AC90~132V	12V	12.5A(9.37A@50°C)	84%	150W	Built-in	UL	208x74x45/0.95kg



UPF-WQ



- Constant voltage design
- Wide input voltage range
- Built-in PFC function
- Protections : Over load/Over voltage/Short circuit /Over temperature
- Cooling by free air convection
- IP68 design for outdoor installations
- 100% full load burn-in test
- Suitable for LED lighting and moving sign applications
- Metal case
- 3years warranty

- AC input voltage range : 90~305VAC
- Power Factor : 0.95 min.(Condition:60%~100% rated Power)
- DC adjustment range : Fixed, can be modified within ±10% rated output voltage(but, do not use over the rated power)
- Over load protection : over 100% of rating, auto-recovery
- Over voltage protection : 115-140% rated output voltage
- Withstanding voltage : I-O : 3.75KVAC,I-FG:2KVAC,O-FG:1.5KVAC,1minute
- Isolation resistance : I-O,I-FG,O-FG : 100 M ohms/500VDC
- Working temperature : -40~+70°C/-40~+50°C(200W,300W) (refer to output derating curve of homepage)
- Safety standards : EN61347-1,EN61347-2-13/K61347-1,K61347-2-13
- EMC standards : EN55015,EN61000-3-2,3,EN61547/K00015,K61547

KEY PRODUCT FEATURES

Protections

Over load	Over voltage	Short circuit	Over temp.
✓	✓	✓	✓



TECHNICAL DATA

W	VAC	VDC
100W~300W	AC90~305V	12V/24V
IP	TA	PFC
IP 68	-40~+70°C	≥0.95


WARRANTY



APPROVALS



Model	Packing
UPF100xxWQ	28
UPF150xxWQ	15
UPF200xxWQ	15
UPF300xxWQ	15

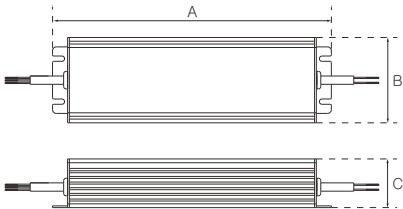

Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	OTP	Approvals	Dimensions [AxBxC]/Weight
UPF100S12WQ	AC90~305V	12V	8.33A	86%	100W	Built-in	KS/KC/CE/CB/PSE	198.6x61.5x36.8/0.76kg
UPF100S24WQ	AC90~305V	24V	4.15A	87%	100W	Built-in	KS/KC/CE/CB/PSE	198.6x61.5x36.8/0.76kg
UPF150S12WQ	AC90~305V	12V	12.5A	89%	150W	Built-in	KS/KC/CE/CB/PSE	223x68x38.8/1.04kg
UPF150S24WQ	AC90~305V	24V	6.25A	90%	150W	Built-in	KS/KC/CE/CB/PSE	223x68x38.8/1.04kg
UPF200S12WQ	AC90~305V	12V	16.6A(12.49A@50°C)	89%	200W	Built-in	KS/KC/PSE	231x68x38.8/1.05kg
UPF200S24WQ	AC90~305V	24V	8.4A(6.3A@50°C)	90%	200W	Built-in	KS/KC/PSE	231x68x38.8/1.05kg
UPF300S12WQ	AC90~305V	12V	22A(18.75A@50°C)at 115Vac 25A(18.75A@50°C)at 230Vac	90%	300W	Built-in	KS/KC/PSE	263x72x40.8/1.4kg
UPF300S24WQ	AC90~305V	24V	11A(9.4A@50°C)at 115Vac 12.5A(10.5A@50°C)at 230Vac	92%	300W	Built-in	KS/KC/PSE	263x72x40.8/1.4kg



UPF-WQ2




- Constant voltage design
- Built-in PFC function
- Protections : Over current/Over voltage/Short circuit
- Cooling by free air convection
- IP68 design for outdoor installations
- 100% full load burn-in test
- Suitable for LED lighting and street lighting applications
- Metal case
- 3years warranty

- AC input voltage range : 160~305VAC
- Power Factor : 0.95 min. (Condition:60%~100% rated Power)
- DC adjustment range : Fixed, can be modified within $\pm 10\%$ rated output voltage (but, do not use over the rated power)
- Over load protection : over 100% of rating, auto-recovery
- Over voltage protection : 115-140% rated output voltage
- Withstanding voltage :
- I-O : 3.75KVAC, I-FG:2KVAC, O-FG:1.5KVAC, 1 minute
- Isolation resistance : I-O, I-FG, O-FG : 100 M ohms/500VDC
- Working temperature : -40~+70°C
- (refer to output derating curve of homepage)
- Safety standards : K61347-1, K61347-2-13
- EMC standards : K00015, K61547

Protections

Over current	Over voltage	Short circuit	Over temp.
✓	✓	✓	

Model	Packing
UPF80S12WQ2	30
UPF100S12WQ2	30
UPF150S12WQ2	28
UPF200S12WQ2	18
UPF300S12WQ2	15

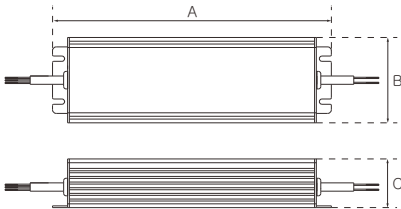

KEY PRODUCT FEATURES



TECHNICAL DATA

W	VAC	VDC
80W~300W	AC160~305V	12V
IP	TA	PFC
IP 68	-40~+70°C	≥ 0.95

WARRANTY



APPROVALS



Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	Approvals	Dimensions [AxBxC]/Weight
UPF80S12WQ2	AC160~305V	12V	6.66A	85%	80W	KS/KC	184x61.5x37.1/0.64kg
UPF100S12WQ2	AC160~305V	12V	7.1A	85%	86W	KS/KC	184x61.5x37.1/0.64kg
UPF150S12WQ2	AC160~305V	12V	11A	86%	132W	KS/KC	202x61.5x37.1/0.71kg
UPF200S12WQ2	AC160~305V	12V	15A	88%	180W	KS/KC	222x61.5x37.1/0.77kg
UPF300S12WQ2	AC160~305V	12V	22A(18.75A@50°C)	89%	264W	KS/KC	263x68x38.8/1.15kg



UPF-CQH



□ Constant voltage or current design
 (30W,200W : C.C. mode only & 12V : C.V. mode only)
 Wide input voltage range
 Built-in PFC function
 Protections : Over current/Over voltage/Short circuit
 /Over temperature
 Cooling by free air convection
 IP68 design for outdoor installations
 Output voltage and current level can be adjusted
 through internal potentiometer(except for 12V)
 100% full load burn-in test
 Suitable for LED lighting and street lighting applications
 Metal case(30CQH) : Plastic case)
 5years warranty

□ AC input voltage range : 90~305VAC
 (30W : 180~264VAC / 200W : 180~305VAC)
 Power Factor : 0.95 min.(Condition:60%~100% rated Power)
 Output voltage and current level can be adjusted through internal
 potentiometer
 -Voltage adj. range : $\pm 10\%$ rated output voltage
 (but,do not use over the rated power)
 -Current adj. range : 60~100% rated output current(except for 12V)
 Over current protection :
 95~108%(refer to "DRIVING METHODS of LED MODULE")
 Over voltage protection : 115~140% rated output voltage
 Withstanding voltage :
 I-O : 3.75KVAC,I-FG:2KVAC,O-FG:1.5KVAC,1 minute
 Isolation resistance : I-O-I-FG,O-FG : 100 M ohms/500VDC
 Working temperature : -40~+70°C
 (refer to output derating curve of homepage)
 Safety standards : EN61347-1,EN61347-2-13/K61347-1,K61347-2-13
 /J61347-1,J61347-2-13
 EMC standards : EN55015,EN61000-3-2,3,EN61547/K00015,K61547/J55015

KEY PRODUCT FEATURES

Protections

Over current	Over voltage	Short circuit	Over temp.
✓	✓	✓	✓



100W~250W

TECHNICAL DATA

W	VAC	VDC
30W~250W	AC90~305V (30W : 180~264VAC 200W : 180~305VAC)	12V/24V 36V/48V
IP	TA	PFC
IP 68	-40~+70°C	≥ 0.95


WARRANTY



APPROVALS



Model	Packing
UPF30S36CQHP	72
UPF30SxxCQH	30
UPF40SxxCQH	30
UPF60SxxCQH	30
UPF80SxxCQH	28
UPF100SxxCQH	15
UPF150SxxCQH	15
UPF200SxxCQH(CQHF)	15
UPF250SxxCQH	15

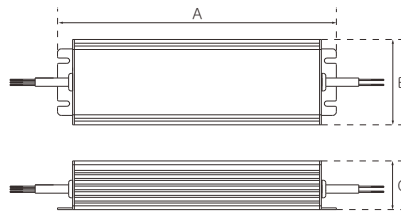

Model No.	Input Voltage	Output Voltage	C.C. region	Output Current	Efficiency	Max. Power	OTP	Approvals	Dimensions [AxBxC]/Weight
UPF30S36CQHP	AC180~264V	36V	28V~36V	0.7A	85%	30W	-	KS/KC	146.5x42x35/0.3kg
UPF30S36CQH	AC180~264V	36V	26V~36V	0.8A	85%	30W	-	KS/KC/CE/CB	174x61.5x36.8/0.66kg
UPF30S48CQH	AC180~264V	48V	36V~48V	0.65A	86%	30W	-	KS/KC	174x61.5x36.8/0.66kg
UPF40S12CQH	AC90~305V	12V	C.V. mode	3.33A	84%	40W	Built-in	KS/KC/CE/CB/PSE	174x61.5x36.8/0.66kg
UPF40S24CQH	AC90~305V	24V	14.4V~24V	1.67A	85%	40W	Built-in	KS/KC/CE/CB/PSE	174x61.5x36.8/0.66kg
UPF40S36CQH	AC90~305V	36V	21.6V~36V	1.12A	85%	40W	Built-in	KS/KC/CE/CB/PSE	174x61.5x36.8/0.66kg
UPF40S48CQH	AC90~305V	48V	28.8V~48V	0.84A	87%	40W	Built-in	KS/KC/CE/CB/PSE	174x61.5x36.8/0.66kg
UPF60S12CQH	AC90~305V	12V	C.V. mode	5A	84%	60W	Built-in	KS/KC/CE/CB/PSE	174x61.5x36.8/0.66kg
UPF60S24CQH	AC90~305V	24V	14.4V~24V	2.5A	86%	60W	Built-in	KS/KC/CE/CB/PSE	174x61.5x36.8/0.66kg
UPF60S36CQH	AC90~305V	36V	21.6V~36V	1.7A	86%	60W	Built-in	KS/KC/CE/CB/PSE	174x61.5x36.8/0.66kg
UPF60S48CQH	AC90~305V	48V	28.8V~48V	1.25A	88%	60W	Built-in	KS/KC/CE/CB/PSE	174x61.5x36.8/0.66kg
UPF80S12CQH	AC90~305V	12V	C.V. mode	6.66A	85%	80W	Built-in	KS/KC/CE/CB/PSE	198.6x61.5x36.8/0.76kg
UPF80S24CQH	AC90~305V	24V	14.4V~24V	3.4A	87%	80W	Built-in	KS/KC/CE/CB/PSE	198.6x61.5x36.8/0.76kg
UPF80S36CQH	AC90~305V	36V	21.6V~36V	2.3A	88%	80W	Built-in	KS/KC/CE/CB/PSE	198.6x61.5x36.8/0.76kg
UPF80S48CQH	AC90~305V	48V	28.8V~48V	1.7A	89%	80W	Built-in	KS/KC/CE/CB/PSE	198.6x61.5x36.8/0.76kg
UPF100S12CQH	AC90~305V	12V	C.V. mode	8.33A	88%	100W	Built-in	KS/KC/CE/CB/PSE	223x68x38.8/1.04kg
UPF100S24CQH	AC90~305V	24V	12V~24V	4.2A	90%	100W	Built-in	KS/KC/CE/CB/PSE	223x68x38.8/1.04kg
UPF100S36CQH	AC90~305V	36V	22V~36V	2.8A	90%	100W	Built-in	KS/KC/CE/CB/PSE	223x68x38.8/1.04kg
UPF100S48CQH	AC90~305V	48V	24V~48V	2.1A	91%	100W	Built-in	KS/KC/CE/CB/PSE	223x68x38.8/1.04kg
UPF150S12CQH	AC90~305V	12V	C.V. mode	12.5A	89%	150W	Built-in	KS/KC/CE/CB/PSE	231x68x38.8/1.05kg
UPF150S24CQH	AC90~305V	24V	12V~24V	6.3A	90%	150W	Built-in	KS/KC/CE/CB/PSE	231x68x38.8/1.05kg
UPF150S36CQH	AC90~305V	36V	18V~36V	4.2A	91%	150W	Built-in	KS/KC/CE/CB/PSE	231x68x38.8/1.05kg
UPF150S48CQH	AC90~305V	48V	24V~48V	3.2A	91%	150W	Built-in	KS/KC/CE/CB/PSE	231x68x38.8/1.05kg
UPF150S60CQH	AC90~305V	60V	45V~65V	2.5A	91%	150W	Built-in	KS/CE/CB/PSE	231x68x38.8/1.05kg
UPF200S36CQH	AC180~305V	36V	18V~36V	5.6A	92%	200W	Built-in	KS/KC	241x68x38.8/1.07kg
UPF200S48CQH	AC180~305V	48V	24V~48V	4.2A	92%	200W	Built-in	KS/KC	241x68x38.8/1.07kg
UPF200S36CQHF	AC90~305V	36V	24V~36V	5.2A	92%	200W	Built-in	KS/KC	263x68x38.8/1.15kg
UPF200S48CQHF	AC90~305V	48V	36V~48V	3.9A	92%	200W	Built-in	KS/KC	263x68x38.8/1.15kg
UPF250S12CQH	AC90~305V	12V	C.V. mode	18.75A	90%	225W	Built-in	KS/KC/CE/CB/PSE	263x72x40.8/1.4kg
UPF250S24CQH	AC90~305V	24V	12V~24V	10.5A	91%	250W	Built-in	KS/KC/CE/CB/PSE	263x72x40.8/1.4kg
UPF250S36CQH	AC90~305V	36V	18V~36V	7A	92%	250W	Built-in	KS/KC/CE/CB/PSE	263x72x40.8/1.4kg
UPF250S48CQH	AC90~305V	48V	24V~48V	5.2A	92%	250W	Built-in	KS/KC/CE/CB/PSE	263x72x40.8/1.4kg

Note.

Cable for I/O connection

Output voltage and current level can be adjusted through internal potentiometer

UPF-CQHD



- Constant current design
- Wide input voltage range
- Built-in PFC function
- Protections : Over current/Over voltage/Short circuit /Over temperature
- Cooling by free air convection
- IP68 design for outdoor installations
- Output voltage and current level can be adjusted through internal potentiometer
- 3 in 1 dimming function
- 100% full load burn-in test
- Suitable for LED lighting and street lighting applications
- Metal case(30CQHP : Plastic case)
- 5years warranty
- AC input voltage range : 90~305VAC
(30W : 180~264VAC / 200W : 180~305VAC)
Power Factor : 0.95 min.(Condition:60%~100% rated Power)
Output voltage and current level can be adjusted through internal potentiometer
- Voltage adj. range : $\pm 10\%$ rated output voltage (but,do not use over the rated power)
- Current adj. range : 60~100% rated output current
- Over current protection : 95~108%(refer to "DRIVING METHODS of LED MODULE")
- Over voltage protection : 115~140% rated output voltage
- Withstanding voltage : I-O : 3.75KVAC,I-FG:2KVAC,O-FG:1.5KVAC,1 minute
- Isolation resistance : I-O-I-FG,O-FG : 100 M ohms/500VDC
- Working temperature : -40~+70°C (refer to output derating curve of homepage)
- Safety standards : EN61347-1,EN61347-2-13/K61347-1,K61347-2-13 /J61347-1,J61347-2-13
- EMC standards : EN55015,EN61000-3-2,EN61547/K00015,K61547/J55015

KEY PRODUCT FEATURES

Protections

Over current	Over voltage	Short circuit	Over temp.
✓	✓	✓	✓



100W~250W

TECHNICAL DATA

W	VAC	VDC
30W~250W	AC90~305V (30W : 180~264VAC 200W : 180~305VAC)	24V/36V 48V/60V(150W)
IP	TA	PFC
IP 68	-40~+70°C	≥ 0.95


WARRANTY



APPROVALS



Model	Packing
UPF30S36CQHPD	72
UPF30SxxCQHD	30
UPF40SxxCQHD	30
UPF60SxxCQHD	30
UPF80SxxCQHD	28
UPF100SxxCQHD	15
UPF150SxxCQHD	15
UPF200SxxCQHD(CQHFD)	15
UPF250SxxCQHD	15

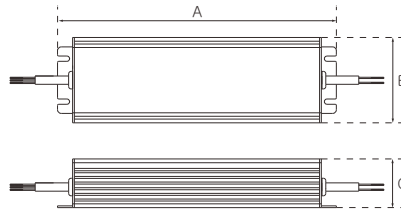

Model No.	Input Voltage	Output Voltage	C.C. region	Output Current	Efficiency	Max. Power	OTP	Approvals	Dimensions [AxBxC]/Weight
UPF30S36CQHPD	AC180~264V	36V	28V~36V	0.7A	85%	30W	-	KS/KC	146.5x42x35/0.3kg
UPF30S36CQHD	AC180~264V	36V	26V~36V	0.8A	85%	30W	-	KS/KC/CE/CB	174x61.5x36.8/0.66kg
UPF30S48CQHD	AC180~264V	48V	36V~48V	0.65A	86%	30W	-	KS/KC	174x61.5x36.8/0.66kg
UPF40S24CQHD	AC90~305V	24V	14.4V~24V	1.67A	85%	40W	Built-in	KS/KC/CE/CB/PSE	174x61.5x36.8/0.66kg
UPF40S36CQHD	AC90~305V	36V	21.6V~36V	1.12A	85%	40W	Built-in	KS/KC/CE/CB/PSE	174x61.5x36.8/0.66kg
UPF40S48CQHD	AC90~305V	48V	28.8V~48V	0.84A	87%	40W	Built-in	KS/KC/CE/CB/PSE	174x61.5x36.8/0.66kg
UPF60S24CQHD	AC90~305V	24V	14.4V~24V	2.5A	86%	60W	Built-in	KS/KC/CE/CB/PSE	174x61.5x36.8/0.66kg
UPF60S36CQHD	AC90~305V	36V	21.6V~36V	1.7A	86%	60W	Built-in	KS/KC/CE/CB/PSE	174x61.5x36.8/0.66kg
UPF60S48CQHD	AC90~305V	48V	28.8V~48V	1.25A	88%	60W	Built-in	KS/KC/CE/CB/PSE	174x61.5x36.8/0.66kg
UPF80S24CQHD	AC90~305V	24V	14.4V~24V	3.4A	87%	80W	Built-in	KS/KC/CE/CB/PSE	198.6x61.5x36.8/0.76kg
UPF80S36CQHD	AC90~305V	36V	21.6V~36V	2.3A	88%	80W	Built-in	KS/KC/CE/CB/PSE	198.6x61.5x36.8/0.76kg
UPF80S48CQHD	AC90~305V	48V	28.8V~48V	1.7A	89%	80W	Built-in	KS/KC/CE/CB/PSE	198.6x61.5x36.8/0.76kg
UPF100S24CQHD	AC90~305V	24V	12V~24V	4.2A	90%	100W	Built-in	KS/KC/CE/CB/PSE	223x68x38.8/1.04kg
UPF100S36CQHD	AC90~305V	36V	22V~36V	2.8A	90%	100W	Built-in	KS/KC/CE/CB/PSE	223x68x38.8/1.04kg
UPF100S48CQHD	AC90~305V	48V	24V~48V	2.1A	91%	100W	Built-in	KS/KC/CE/CB/PSE	223x68x38.8/1.04kg
UPF150S24CQHD	AC90~305V	24V	12V~24V	6.3A	90%	150W	Built-in	KS/KC/CE/CB/PSE	231x68x38.8/1.05kg
UPF150S36CQHD	AC90~305V	36V	18V~36V	4.2A	91%	150W	Built-in	KS/KC/CE/CB/PSE	231x68x38.8/1.05kg
UPF150S48CQHD	AC90~305V	48V	24V~48V	3.2A	91%	150W	Built-in	KS/KC/CE/CB/PSE	231x68x38.8/1.05kg
UPF150S60CQHD	AC90~305V	60V	45V~65V	2.5A	91%	150W	Built-in	KS/CE/CB/PSE	231x68x38.8/1.05kg
UPF200S36CQHD	AC180~305V	36V	18V~36V	5.6A	92%	200W	Built-in	KS/KC	241x68x38.8/1.07kg
UPF200S48CQHD	AC180~305V	48V	24V~48V	4.2A	92%	200W	Built-in	KS/KC	241x68x38.8/1.07kg
UPF200S36CQHFD	AC90~305V	36V	24V~36V	5.2A	92%	200W	Built-in	KS/KC	263x68x38.8/1.15kg
UPF200S48CQHFD	AC90~305V	48V	36V~48V	3.9A	92%	200W	Built-in	KS/KC	263x68x38.8/1.15kg
UPF250S24CQHD	AC90~305V	24V	12V~24V	10.5A	91%	250W	Built-in	KS/KC/CE/CB/PSE	263x72x40.8/1.4kg
UPF250S36CQHD	AC90~305V	36V	18V~36V	7A	92%	250W	Built-in	KS/KC/CE/CB/PSE	263x72x40.8/1.4kg
UPF250S48CQHD	AC90~305V	48V	24V~48V	5.2A	92%	250W	Built-in	KS/KC/CE/CB/PSE	263x72x40.8/1.4kg

Note.

Constant current level adjusted through output cable with 1-10Vdc or 10V PWM signal or resistance

UPF-CQ2



- Constant current design(12V : C.V. mode only)
- Wide input voltage range
- Built-in PFC function
- Protections : Over current/Over voltage/Short circuit/Over temperature(100W~240W)
- Cooling by free air convection
- IP68 design for outdoor installations
- 100% full load burn-in test
- Suitable for LED lighting and street & tunnel lighting applications
- Metal case
- 5years warranty

- AC input voltage range : 90~305VAC(120W,150W,240W : 160~305VAC)
- Power Factor : 0.95 min.(Condition:60%~100% rated Power)
- Output current level can be adjusted through internal potentiometer
- Current adj. range : 60~100% rated output current(except for 12V)
- Over current protection : 95~108% (refer to "DRIVING METHODS of LED MODULE")
- Over voltage protection : 115~140% rated output voltage
- Withstanding voltage :
- I-O : 3.75KVAC,I-FG:2KVAC,O-FG:1.5KVAC,1 minute
- Isolation resistance : I-O,I-FG,O-FG : 100 M ohms/500VDC
- Working temperature : -40~+70°C (refer to output derating curve of homepage)
- Safety standards : EN61347-1,EN61347-2-13/K61347-1,K61347-2-13
- EMC standards : EN55015,EN61000-3-2,3,EN61547/K00015,K61547


KEY PRODUCT FEATURES

Protections

Over current	Over voltage	Short circuit	Over temp.
✓	✓	✓	✓ 100W~240W



Model	Packing
UPF60SxxCQ2	30
UPF80SxxCQ2	30
UPF100SxxCQ2	28
UPF120SxxCQ2/(V2)	18
UPF150SxxCQ2/(V2)	18
UPF200SxxCQ2	15
UPF240SxxCQ2	15

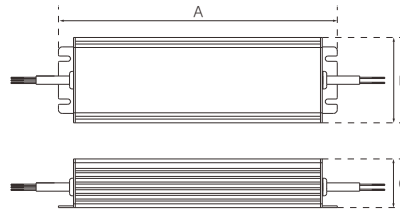

TECHNICAL DATA

W 60W~240W	VAC AC90~305V (120W,150W,240W 160~305VAC)	VDC 12V/36V /48V
IP IP 68	TA -40~+70°C	PFC ≥0.95

WARRANTY



APPROVALS



Model No.	Input Voltage	Output Current	Output Voltage	C.C. region	Efficiency	Max. Power	OTP	Approvals	Dimensions [AxBxC]/Weight
UPF60S12CQ2	AC90~160V	3.75A	12V	C.V. mode	84%	60W	-	KS/KC/CE/CB	184x61.5x37.1/0.64kg
	AC160~305V	5A							
	AC90~160V	1.3A							
UPF60S36CQ2	AC160~305V	1.7A	36V	21.6V~36V	87%	60W	-	KS/KC/CE/CB	184x61.5x37.1/0.64kg
	AC90~160V	0.9A							
	AC160~305V	1.25A							
UPF60S48CQ2	AC90~160V	5A	48V	28.8V~48V	88%	60W	-	KS/KC/CE/CB	184x61.5x37.1/0.64kg
	AC160~305V	6.66A							
	AC90~160V	1.7A							
UPF80S12CQ2	AC160~305V	2.3A	12V	C.V. mode	85%	80W	-	KS/KC/CE/CB	184x61.5x37.1/0.64kg
	AC90~160V	1.3A							
	AC160~305V	1.7A							
UPF80S36CQ2	AC90~160V	5.9A	36V	21.6V~36V	88%	80W	-	KS/KC/CE/CB	184x61.5x37.1/0.64kg
	AC160~305V	2.3A							
	AC90~160V	1.3A							
UPF80S48CQ2	AC160~305V	1.7A	48V	28.8V~48V	89%	80W	-	KS/KC/CE/CB	184x61.5x37.1/0.64kg
	AC90~160V	5.9A							
	AC160~305V	2.1A							
UPF100S12CQ2	AC160~305V	8.4A	12V	C.V. mode	86%	100W	Built-in	KS/KC/CE/CB	202x61.5x37.1/0.71kg
	AC90~160V	2A							
	AC160~305V	2.8A							
UPF100S36CQ2	AC90~160V	1.5A	36V	18V~36V	89%	100W	Built-in	KS/KC/CE/CB	202x61.5x37.1/0.71kg
	AC160~305V	2.1A							
	AC160~305V	2.1A							
UPF100S48CQ2	AC160~305V	2.1A	48V	24V~48V	90%	100W	Built-in	KS/KC/CE/CB	202x61.5x37.1/0.71kg
	AC160~305V	2.1A							
	AC160~305V	2.1A							
UPF120S12CQ2	AC160~305V	10A	12V	C.V. mode	88%	120W	Built-in	KS	222x61.5x37.1/0.77kg
UPF120S36CQ2/(V2)	AC160~305V	3.3A	36V	18V~36V	88%/91%	120W	Built-in	KS/KC	222x61.5x37.1/0.77kg
UPF120S48CQ2/(V2)	AC160~305V	2.5A	48V	24V~48V	89%/91%	120W	Built-in	KS/KC	222x61.5x37.1/0.77kg
UPF150S12CQ2	AC160~305V	12.5A	12V	C.V. mode	88%	150W	Built-in	KS/KC/CE/CB	222x61.5x37.1/0.77kg
UPF150S36CQ2/(V2)	AC160~305V	4.2A	36V	18V~36V	88%/91%	150W	Built-in	KS/KC	222x61.5x37.1/0.77kg
UPF150S48CQ2/(V2)	AC160~305V	3.2A	48V	24V~48V	89%/91%	150W	Built-in	KS/KC	222x61.5x37.1/0.77kg
UPF200S12CQ2	AC90~160V	12A	12V	C.V. mode	89%	192W	Built-in	KS/KC/CE/CB	241x68x38.8/1.07kg
	AC160~305V	16A							
	AC90~160V	4.2A							
UPF200S36CQ2	AC160~305V	5.6A	36V	22V~36V	92%	200W	Built-in	KS/KC	241x68x38.8/1.07kg
	AC90~160V	3.15A							
	AC160~305V	4.2A							
UPF200S48CQ2	AC160~305V	4.2A	48V	30V~48V	92%	200W	Built-in	KS/KC	241x68x38.8/1.07kg
	AC160~305V	4.2A							
	AC160~305V	4.2A							
UPF240S12CQ2	AC160~305V	18.75A	12V	C.V. mode	89%	225W	-	KS/KC	263x68x38.8/1.15kg
UPF240S36CQ2	AC160~305V	6.7A	36V	22V~36V	92%	240W	Built-in	KS/KC	263x68x38.8/1.15kg
UPF240S48CQ2	AC160~305V	5A	48V	30V~48V	92%	240W	Built-in	KS/KC	263x68x38.8/1.15kg

Note.
Cable for I/O connection
Output current level can be adjusted through internal potentiometer

UPF-CQ2D



- Constant current design
- Wide input voltage range
- Built-in PFC function
- Protections : Over current/Over voltage/Short circuit /Over temperature(100W~240W)
- Cooling by free air convection
- IP68 design for outdoor installations
- 3 in 1 dimming function
- 100% full load burn-in test
- Suitable for LED lighting and street & tunnel lighting applications
- Metal case
- 5years warranty


- AC input voltage range : 90~305VAC(120W,150W,240W : 160~305VAC)
- Power Factor : 0.95 min.(Condition:60%~100% rated Power)
- Output current level can be adjusted through internal potentiometer
- Current adj. range : 60~100% rated output current
- Over current protection : 95~108% (refer to "DRIVING METHODS of LED MODULE")
- Over voltage protection : 115~140% rated output voltage
- Withstanding voltage :
- I-O : 3.75KVAC,I-FG:2KVAC,O-FG:1.5KVAC,1 minute
- Isolation resistance : I-O,I-FG,O-FG : 100 M ohms/500VDC
- Working temperature : -40~+70°C (refer to output derating curve of homepage)
- Safety standards : EN61347-1,EN61347-2-13/K61347-1,K61347-2-13
- EMC standards : EN55015,EN61000-3-2,3,EN61547/K00015,K61547

KEY PRODUCT FEATURES

Protections

Over current	Over voltage	Short circuit	Over temp.
✓	✓	✓	✓ 100W~240W

Model	Packing
UPF60SxxCQ2D	30
UPF80SxxCQ2D	30
UPF100xxCQ2D	28
UPF120xxCQ2D/(V2)	18
UPF150xxCQ2D/(V2)	18
UPF200xxCQ2D	15
UPF240xxCQ2D	15

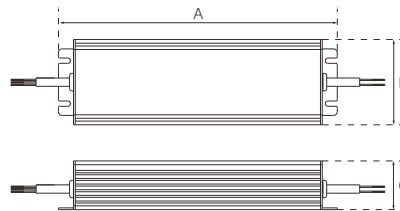

TECHNICAL DATA

W 60W~240W	VAC AC90~305V (120W,150W,240W : 160~305VAC)	VDC 36V/48V
IP IP 68	TA -40~+70°C	PFC ≥0.95

WARRANTY



APPROVALS



Model No.	Input Voltage	Output Current	Output Voltage	C.C. region	Efficiency	Max. Power	OTP	Approvals	Dimensions [AxBxC]/Weight
UPF60S36CQ2D	AC90~160V	1.3A	36V	21.6V~36V	87%	60W	-	KS/KC/CE/CB	184x61.5x37.1/0.64kg
	AC160~305V	1.7A							
UPF60S48CQ2D	AC90~160V	0.9A	48V	28.8V~48V	88%	60W	-	KS/KC/CE/CB	184x61.5x37.1/0.64kg
	AC160~305V	1.25A							
UPF80S36CQ2D	AC90~160V	1.7A	36V	21.6V~36V	88%	80W	-	KS/KC/CE/CB	184x61.5x37.1/0.64kg
	AC160~305V	2.3A							
UPF80S48CQ2D	AC90~160V	1.3A	48V	28.8V~48V	89%	80W	-	KS/KC/CE/CB	184x61.5x37.1/0.64kg
	AC160~305V	1.7A							
UPF100S36CQ2D	AC90~160V	2A	36V	18V~36V	89%	100W	Built-in	KS/KC/CE/CB	202x61.5x37.1/0.71kg
	AC160~305V	2.8A							
UPF100S48CQ2D	AC90~160V	1.5A	48V	24V~48V	90%	100W	Built-in	KS/KC/CE/CB	202x61.5x37.1/0.71kg
	AC160~305V	2.1A							
UPF120S36CQ2D/(V2)	AC160~305V	3.3A	36V	18V~36V	88%/91%	120W	Built-in	KS/KC	222x61.5x37.1/0.77kg
UPF120S48CQ2D/(V2)	AC160~305V	2.5A	48V	24V~48V	89%/91%	120W	Built-in	KS/KC	222x61.5x37.1/0.77kg
UPF150S36CQ2D/(V2)	AC160~305V	4.2A	36V	18V~36V	88%/91%	150W	Built-in	KS/KC	222x61.5x37.1/0.77kg
UPF150S48CQ2D/(V2)	AC160~305V	3.2A	48V	24V~48V	89%/91%	150W	Built-in	KS/KC	222x61.5x37.1/0.77kg
UPF200S36CQ2D	AC90~160V	4.2A	36V	22V~36V	92%	200W	Built-in	KS/KC	241x68x38.8/1.07kg
	AC160~305V	5.6A							
UPF200S48CQ2D	AC90~160V	3.15A	48V	30V~48V	92%	200W	Built-in	KS/KC	241x68x38.8/1.07kg
	AC160~305V	4.2A							
UPF240S36CQ2D	AC160~305V	6.7A	36V	22V~36V	92%	240W	Built-in	KS/KC	263x68x38.8/1.15kg
UPF240S48CQ2D	AC160~305V	5A	48V	30V~48V	92%	240W	Built-in	KS/KC	263x68x38.8/1.15kg

Note.

Constant current level adjusted through output cable with 0-10Vdc or 10V PWM signal or resistance(200W : 1-10Vdc)

UPF-CP2(D)



- Constant current design
- Built-in PFC function
- Protections : Over current/Short circuit /Over temperature(120W~600W)
- Cooling by free air convection
- IP68 design for outdoor installations
- 3 in 1 dimming function(option : D type)
- 100% full load burn-in test
- Suitable for LED lighting and street & tunnel lighting applications
- Metal case
- 5years warranty

- AC input voltage range : 180~264VAC (refer to static characteristics curve of homepage)
- Power Factor : 0.95 min.(Condition:75%~100% rated Power)
- Output current level can be adjusted through internal potentiometer : 65~100% rated output current
- Over current protection : 95~108%(refer to "DRIVING METHODS of LED MODULE")
- Withstanding voltage : I-O : 3.75KVAC,I-FG:2KVAC,O-FG:1.5KVAC,1minute
- Isolation resistance : I-O,I-FG,O-FG : 100 M ohms/500VDC
- Working temperature : -30~+50°C (refer to output derating curve of homepage)
- Safety standards : K61347-1,K61347-2-13
- EMC standards : K00015,K61547


KEY PRODUCT FEATURES



Protections

Over current	Over voltage	Short circuit	Over temp.
✓		✓	✓
			120W~500W OTP : 25% dim down method

Model	Packing
UPF50SxxCP2	28
UPF80SxxCP2	28
UPF100xxCP2	28
UPF120xxCP2	18
UPF150xxCP2	18
UPF200xxCP2	18
UPF300xxCP2(D)	15
UPF400xxCP2(D)	15
UPF500xxCP2(D)	10
UPF600xxCP2(D)	10

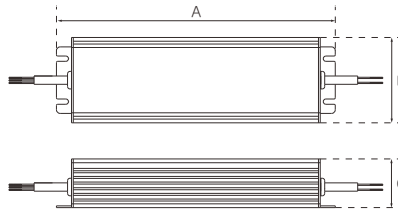

TECHNICAL DATA

W	VAC	VDC
50W~600W	AC180~264V	36V/48V 150V/250V
IP	TA	PFC
IP 68	-30~+50°C	≥0.95

WARRANTY



APPROVALS



Model No.	Input Voltage	Output Voltage	C.C. region	Output Current	Efficiency	Max. Power	OTP	Approvals	Dimensions [AxBxC]/Weight
UPF50S36CP2	AC180~264V	36V	20V~36V	1.25A	87%	45W	-	KS/KC	140x52.6x30/0.35kg
UPF50S48CP2	AC180~264V	48V	26V~48V	0.94A	88%	45W	-	KS/KC	140x52.6x30/0.35kg
UPF80S36CP2	AC180~264V	36V	20V~36V	2.0A	89%	72W	-	KS/KC	184x61.5x37.1/0.66kg
UPF80S48CP2	AC180~264V	48V	26V~48V	1.5A	89%	72W	-	KS/KC	184x61.5x37.1/0.66kg
UPF100S36CP2	AC180~264V	36V	20V~36V	2.5A	90%	90W	-	KS/KC	184x61.5x37.1/0.66kg
UPF100S48CP2	AC180~264V	48V	26V~48V	1.9A	90%	90W	-	KS/KC	184x61.5x37.1/0.66kg
UPF120S30CP2	AC180~264V	30V	22V~30V	3.56A	89%	106W	Built-in	KS/KC	226x61.5x37.1/0.8kg
UPF120S36CP2	AC180~264V	36V	26V~36V	3.0A	89%	106W	Built-in	KS/KC	226x61.5x37.1/0.8kg
UPF120S48CP2	AC180~264V	48V	36V~48V	2.20A	89%	106W	Built-in	KS/KC	226x61.5x37.1/0.8kg
UPF150S30CP2	AC180~264V	30V	22V~30V	4.45A	88%	133.5W	Built-in	KS/KC	226x61.5x37.1/0.8kg
UPF150S36CP2	AC180~264V	36V	26V~36V	3.7A	88%	133.5W	Built-in	KS/KC	226x61.5x37.1/0.8kg
UPF150S48CP2	AC180~264V	48V	36V~48V	2.78A	89%	133.5W	Built-in	KS/KC	226x61.5x37.1/0.8kg
UPF200S36CP2	AC180~264V	36V	26V~36V	5.0A	92%	180W	Built-in	KS/KC	253x61.5x37.1/0.9kg
UPF200S48CP2	AC180~264V	48V	36V~48V	3.8A	92%	180W	Built-in	KS/KC	253x61.5x37.1/0.9kg
UPF300S36CP2(D)	AC180~264V	36V	26V~36V	7.7A	92%	277W	Built-in	KS/KC	263x72x40.8/1.4kg
UPF300S48CP2(D)	AC180~264V	48V	37V~48V	5.7A	92%	275W	Built-in	KS/KC	263x72x40.8/1.4kg
NEW UPF300S150CP2(D)	AC180~264V	150V	115V~165V	1.8A	93%	270W	Built-in	KS/KC	263x72x40.8/1.4kg
UPF400S36CP2(D)	AC180~264V	36V	32V~36V	10.3A	93%	372W	Built-in	KS/KC	307.2x74x46.5/1.7kg
UPF400S48CP2(D)	AC180~264V	48V	42V~48V	7.8A	94%	376W	Built-in	KS/KC	307.2x74x46.5/1.7kg
NEW UPF500S36CP2(D)	AC180~264V	36V	32V~36V	13A	93.5%	468W	Built-in	KS/KC	297x125.5x46.2/2.9kg
UPF500S48CP2(D)	AC180~264V	48V	43V~48V	9.8A	93.5%	470W	Built-in	KS/KC	297x125.5x46.2/2.9kg
UPF500S150CP2(D)	AC180~264V	150V	120V~170V	3.13A	94.5%	470W	Built-in	KS/KC	297x125.5x46.2/2.9kg
UPF500S250CP2(D)	AC180~264V	250V	220V~275V	1.88A	94.5%	470W	Built-in	KS/KC	297x125.5x46.2/2.9kg
NEW UPF600S48CP2(D)	AC180~264V	48V	43V~48V	11.75A	94%	564W	Built-in	KS/KC	297x125.5x46.2/3kg
UPF600S150CP2(D)	AC180~264V	150V	120V~170V	3.74A	94.5%	564W	Built-in	KS/KC	297x125.5x46.2/3kg
NEW UPF600S250CP2(D)	AC180~264V	250V	220V~275V	2.25A	94.5%	564W	Built-in	KS/KC	297x125.5x46.2/3kg

Note.

300W/400W/500W : Constant current level adjusted through output cable with 1-10Vdc or 10V PWM signal or resistance
600W : Constant current level adjusted through output cable with 0-10Vdc or 10V PWM signal or resistance

UPF-CQ2DP



- Constant current design
- Wide input voltage range
- Built-in PFC function
- Protections : Over current/Over voltage/Short circuit
- Cooling by free air convection
- IP68 design for outdoor installations
- 3 in 1 dimming function
- 100% full load burn-in test
- Suitable for LED lighting and street & tunnel lighting applications
- Metal case
- 5years warranty

- AC input voltage range : 160~305VAC
(refer to static characteristics curve of homepage)
- Power Factor : 0.95 min.(Condition : 100% rated Power)
- Output current level can be adjusted through internal potentiometer : 60~100% rated output current
- Over current protection : 95~108%(refer to "DRIVING METHODS of LED MODULE")
- Over voltage protection : 110-140% rated output voltage
- Withstanding voltage :
I-O : 3.75KVAC,I-FG:2KVAC,O-FG:1.5KVAC,1 minute
- Isolation resistance : I-O,I-FG,O-FG : 100 M ohms/500VDC
- Working temperature : -40~+70°C
(refer to output derating curve of homepage)
- Safety standards : K61347-1,K61347-2-13
- EMC standards : K00015,K61547

KEY PRODUCT FEATURES




Protections

Over current	Over voltage	Short circuit	Over temp.
✓	✓	✓	

Model Packing

Model	Packing
UPF60SxxCQ2DP	28
UPF80SxxCQ2DP	28
UPF100xxCQ2DP	28
UPF150xxCQ2DP	15

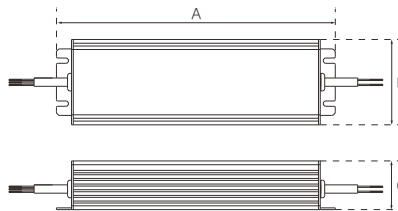

TECHNICAL DATA

W	VAC	VDC
60W~150W	AC160~305V	36V/48V
IP	TA	PFC
IP 68	-40~+70°C	≥0.95

WARRANTY



APPROVALS



Model No.	Input Voltage	Output Current	Output Voltage	C.C. region	Efficiency	Max. Power	Approvals	Dimensions [AxBxC]/Weight
UPF60S36CQ2DP	AC160~305V	1.7A	36V	21.6V~36V	87%	60W	KS/KC	184x68x38.8/0.77kg
UPF60S48CQ2DP	AC160~305V	1.25A	48V	28.8V~48V	88%	60W	KS/KC	184x68x38.8/0.77kg
UPF80S36CQ2DP	AC160~305V	2.3A	36V	21.6V~36V	88%	80W	KS/KC	184x68x38.8/0.77kg
UPF80S48CQ2DP	AC160~305V	1.7A	48V	28.8V~48V	89%	80W	KS/KC	184x68x38.8/0.77kg
UPF100S36CQ2DP	AC160~305V	2.8A	36V	18V~36V	89%	100W	KS/KC	201x68x38.8/0.83kg
UPF100S48CQ2DP	AC160~305V	2.1A	48V	24V~48V	90%	100W	KS/KC	201x68x38.8/0.83kg
UPF150S36CQ2DP	AC160~305V	4.2A	36V	18V~36V	88%	150W	KS/KC	222x68x38.8/0.94kg
UPF150S48CQ2DP	AC160~305V	3.2A	48V	24V~48V	89%	150W	KS/KC	222x68x38.8/0.94kg

<Main Server>



- PPC Individual (64) /Group (16) Address Dimming : Maximum (5KW)

<Wire/Wireless comm>

AC



<Dimming signal>

Address #1

Address #2

Address #3

Address #64



- Communication, using existing AC power line
- Control by group or individual
- Cheap system building cost
- NET (New Excellent Technology) Certification
- Patent
- Patent registered(10-1326040)
- Patent registered(10-1313002)
- Patent registered(10-1756757)
- PCT (KR2016/004937)

TECHNICAL DATA

WARRANTY

APPROVALS

UPF-C7D



- Constant current design
- Built-in PFC function
- Protections : Over current/Over voltage/Short circuit /Over temperature(80W~200W)
- Cooling by free air convection
- IP68 design for outdoor installations
- 3 in 1 dimming function
- 100% full load burn-in test
- Suitable for LED lighting and street & tunnel lighting applications
- Metal case(30C7PD : Plastic case)
- 5years warranty

- AC input voltage range : 180~264VAC
- Power Factor : 0.95 min.(Condition:60%~100% rated Power)
- Output current level can be adjusted through internal potentiometer : 60~100% rated output current
- Over current protection : 95~108%(refer to "DRIVING METHODS of LED MODULE")
- Over voltage protection : 110-140% rated output voltage
- Withstanding voltage : I-O : 3.75KVAC,I-FG:2KVAC,O-FG:1.5KVAC,1minute
- Isolation resistance : I-O,I-FG,O-FG : 100 M ohms/500VDC
- Working temperature : -40~+70°C (refer to output derating curve of homepage)
- Safety standards : K61347-1,K61347-2-13
- EMC standards : K00015,K61547


KEY PRODUCT FEATURES



Protections

Over current	Over voltage	Short circuit	Over temp.
✓	✓	✓	✓ 80W~200W

Model+Bracket	Packing
UPF30S30-C7PD	18
UPF30S30-C7D	15
UPF50S60-C7D	15
UPF80S90-C7D	15
UPF100S120-C7D	15
UPF125S150-C7D	15
UPF150S180-C7D	15
UPF200S240-C7D	15

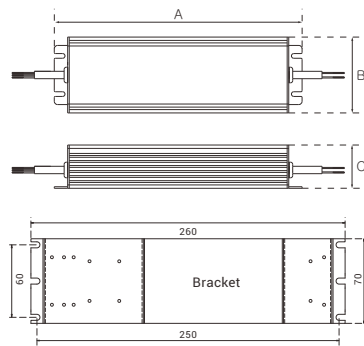

TECHNICAL DATA

W	VAC	VDC
30W~200W	AC180~264V	30V~240V
IP	TA	PFC
IP 68	-40~+70°C	≥0.95

WARRANTY



APPROVALS



Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	OTP	Approvals	Dimensions [AxBxC]/Weight
UPF30S30-C7PD	AC180~264V	30V	0.7A	85%	25W	-	KS/KC	146.5x42x35/0.3kg
UPF30S30-C7D	AC180~264V	30V	0.7A	85%	25W	-	KS/KC	200x61.5x36.8/0.67kg
UPF50S60-C7D	AC180~264V	60V	0.7A	89%	50W	-	KS/KC	200x61.5x36.8/0.67kg
UPF80S90-C7D	AC180~264V	90V	0.7A	89%	80W	Built-in	KS/KC	224.6x61.5x36.8/0.77kg
UPF100S120-C7D	AC180~264V	120V	0.7A	90%	100W	Built-in	KS/KC	198.6x61.5x36.8/0.76kg
UPF125S150-C7D	AC180~264V	150V	0.7A	92%	125W	Built-in	KS/KC	223x68x38.8/0.95kg
UPF150S180-C7D	AC180~264V	180V	0.7A	93%	150W	Built-in	KS/KC	223x68x38.8/0.95kg
UPF200S240-C7D	AC180~264V	240V	0.7A	93%	200W	Built-in	KS/KC	241x68x38.8/1.05kg

Note.

Constant current level adjusted through output cable with 1-10Vdc or 10V PWM signal or resistance



UPF-[D,T,F]-CQ2(D)



Constant current design

Built-in PFC function

Protections : Over current/Over voltage/Short circuit

Cooling by free air convection

IP68 design for outdoor installations

3 in 1 dimming function(150W,200W/option : D type)

100% full load burn-in test

Suitable for LED lighting and street & tunnel lighting applications

Metal case

5years warranty

AC input voltage range : 180~264VAC

(refer to static characteristics curve of homepage)

Power Factor : 0.95 min.(Condition : 60%~100% rated Power)

Over current protection : 95~108%(refer to "DRIVING METHODS of LED MODULE")

Over voltage protection : 110~140% rated output voltage

Withstanding voltage :

I-O : 3.75KVAC,I-FG:2KVAC,O-FG:1.5KVAC,1minute

Isolation resistance : I-O,I-FG,O-FG : 100 M ohms/500VDC

Working temperature : -40~+70°C

(refer to output derating curve of homepage)

Safety standards : K61347-1,K61347-2-13

EMC standards : K00015,K61547

KEY PRODUCT FEATURES



Protections

Over current Over voltage Short circuit Over temp.


✓

✓
150W~200W

✓

Model+Bracket Packing

UPF50D33CQ2	15
UPF75T33CQ2	15
UPF100F33CQ2	15
UPF150D90CQ2(D)	15
UPF200D120CQ2(D)	15

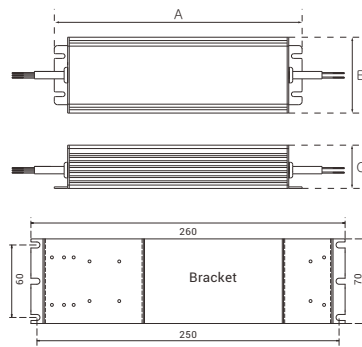

TECHNICAL DATA

W 50W~200W	VAC AC180~264V	VDC 33V/90V120V
IP IP 68	TA -40~+70°C	PFC ≥0.95

WARRANTY



APPROVALS



2Ch

Model No.	Input Voltage	Output Current	Output Voltage	C.C. region	Efficiency	Max. Power	Approvals	Dimensions [AxBxC]/Weight
UPF50D33CQ2	AC180~264V	Ch1-0.7A Ch2-0.7A	Ch1-33V Ch2-33V	18V~30V	88%	42W	KS/KC	168x61.5x37.1/0.54kg
UPF150D90CQ2(D)	AC180~264V	Ch1-0.7A Ch2-0.7A	Ch1-90V Ch2-90V	80V~105V	92%	150W	KS/KC	231x68x38.8/1.05kg
UPF200D120CQ2(D)	AC180~264V	Ch1-0.7A Ch2-0.7A	Ch1-120V Ch2-120V	84V~140V	92%	200W	KS/KC	241x68x38.8/1.05kg

3Ch

Model No.	Input Voltage	Output Current	Output Voltage	C.C. region	Efficiency	Max. Power	Approvals	Dimensions [AxBxC]/Weight
UPF75T33CQ2	AC180~264V	Ch1-0.7A Ch2-0.7A Ch3-0.7A	Ch1-33V Ch2-33V Ch3-33V	18V~30V	87%	63W	KS/KC	222x61.5x37.1/0.75kg

4Ch

Model No.	Input Voltage	Output Current	Output Voltage	C.C. region	Efficiency	Max. Power	Approvals	Dimensions [AxBxC]/Weight
UPF100F33CQ2	AC180~264V	Ch1-0.7A Ch2-0.7A Ch3-0.7A Ch4-0.7A	Ch1-33V Ch2-33V Ch3-33V Ch4-33V	18V~30V	88%	84W	KS/KC	222x61.5x37.1/0.75kg

Note.

Blank type : IP68 rated / Cable for I/O connection.

Output current level can be adjusted through internal potentiometer.

D type : IP68 rated / Constant current level adjusted through output cable with 1-10Vdc or 10V PWM signal or resistance.

UPF-CQHD-EX



- Constant current design
- Built-in PFC function
- Protections : Over current/Over voltage/Short circuit /Over temperature(60W~250W)
- Cooling by free air convection
- IP68 design for outdoor installations
- Output voltage and current level can be adjusted through internal potentiometer
- 3 in 1 dimming function
- 100% full load burn-in test
- Suitable for LED lighting and street & tunnel lighting applications
- Metal case(30CQHPD-EX : Plastic case)
- 5years warranty


- AC input voltage range : 90~305VAC
(30W : 180~264VAC / 200W : 180~305VAC)
- Power Factor : 0.95 min.(Condition:60%~100% rated Power)
- Output voltage and current level can be adjusted through internal potentiometer
- Voltage adj. range : $\pm 10\%$ rated output voltage
(but,do not use over the rated power)
- Current adj. range : Fixed
- Over current protection :
95~108%(refer to "DRIVING METHODS of LED MODULE")
- Over voltage protection : 115~140% rated output voltage
- Withstanding voltage :
I-O : 3.75KVAC,I-FG:2KVAC,O-FG:1.5KVAC,1minute
- Isolation resistance : I-O,I-FG,O-FG : 100 M ohms/500VDC
- Working temperature : -40~+70°C
(refer to output derating curve of homepage)
- Safety standards : K61347-1,K61347-2-13 /J61347-1,J61347-2-13
- EMC standards : K00015,K61547/J55015

KEY PRODUCT FEATURES

Protections

Over current	Over voltage	Short circuit	Over temp.
✓	✓	✓	✓ 60W~250W

Model+Bracket	Packing
UPF30S36CQHPD-EX	18
UPF30S36CQHD-EX	15
UPF50S36CL2D-EX	15
UPF60S36CQHD-EX	15
UPF75S36CL2D-EX	15
UPF80S36CQHD-EX	15
UPF100S36CQHD-EX	15
UPF150S36CQHD-EX	15
UPF200S36CQHD-EX	15
UPF250S36CQHD-EX	15

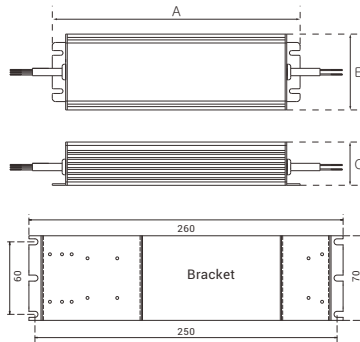

W	VAC	VDC
30W~250W	AC90~305V (30W,50W,75W : 180~264VAC / 200W,180~305VAC)	36V
IP	TA	PFC
IP 68	-40~+70°C	≥ 0.95

WARRANTY



APPROVALS



Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	OTP	Approvals	Dimensions [AxBxC]/Weight
UPF30S36CQHPD-EX	AC180~264V	36V	0.7A	85%	25W	-	KS/KC	146.5x42x35/0.3kg
UPF30S36CQHD-EX	AC180~264V	36V	0.7A	85%	25W	-	KS/KC/CE/CB	174x61.5x36.8/0.66kg
UPF50S36CL2D-EX	AC180~264V	36V	1.4A	88%	50W	Built-in	KS/KC	184x61.5x37.1/0.68kg
UPF60S36CQHD-EX	AC90~305V	36V	1.4A	86%	50W	Built-in	KS/KC/CE/CB/PSE	174x61.5x36.8/0.68kg
UPF75S36CL2D-EX	AC180~264V	36V	2.1A	88%	75W	Built-in	KS/KC	184x61.5x37.1/0.64kg
UPF80S36CQHD-EX	AC90~305V	36V	2.1A	88%	75W	Built-in	KS/KC/CE/CB/PSE	198x61.5x36.8/0.76kg
UPF100S36CQHD-EX	AC90~305V	36V	2.8A	90%	100W	Built-in	KS/KC/CE/CB/PSE	223x68x38.8/1.04kg
UPF150S36CQHD-EX	AC90~305V	36V	4.2A	91%	150W	Built-in	KS/KC/CE/CB/PSE	231x68x38.8/1.05kg
UPF200S36CQHD-EX	AC180~305V	36V	5.6A	92%	200W	Built-in	KS/KC	241x68x38.8/1.07kg
UPF250S36CQHD-EX	AC90~305V	36V	7A	92%	250W	Built-in	KS/KC/CE/CB/PSE	268.8x76.3x45.2/1.5kg

Note.

Constant current level adjusted through output cable with 1-10Vdc or 10V PWM signal or resistance



UPF-CH2(D)·CG2(D)



- Constant current design
- Built-in PFC function
- Protections : Over current/Over voltage/Short circuit /Over temperature(60W~250W)
- Cooling by free air convection
- IP68 design for outdoor installations
- Output voltage and current level can be adjusted through internal potentiometer
- 3 in 1 dimming function(option : D type)
- 100% full load burn-in test
- Suitable for LED lighting and street & tunnel lighting applications
- Metal case
- 5years warranty

- AC input voltage range : 180~264VAC
- Power Factor : 0.95 min.(Condition:60%~100% rated Power)
- Output voltage and current level can be adjusted through internal potentiometer
- Voltage adj. range : $\pm 10\%$ rated output voltage (but,do not use over the rated power)
- Current adj. range : Fixed
- Over current protection : 95~108%(refer to "DRIVING METHODS of LED MODULE")
- Over voltage protection : 115~140% rated output voltage
- Withstanding voltage : I-O : 3.75KVAC,I-FG:2KVAC,O-FG:1.5KVAC,1minute
- Isolation resistance : I-O-I-FG,O-FG : 100 M ohms/500VDC
- Working temperature : -40~+70°C(refer to output derating curve of homepage)
- Safety standards : K61347-1,K61347-2-13
- EMC standards : K00015,K61547

KEY PRODUCT FEATURES



Protections

Over current	Over voltage	Short circuit	Over temp.
✓	✓	✓	✓ 60W~250W

TECHNICAL DATA

W	VAC	VDC
20W~250W	AC180~264V	24V/30V
IP	TA	PFC
IP 68	-40~+70°C	≥ 0.95


WARRANTY



APPROVALS



Model	Packing
UPF20S24CH2/(D)	30
UPF25S30CH2/(D)	30
UPF50S30CH2/(D)	30
UPF60S24CH2/(D)	30
UPF75S30CH2/(D)	30
UPF80S24CH2/(D)	30
UPF100S30CH2/(D)	15
UPF125S24CH2/(D)	15
UPF150S24CH2/(D)	15
UPF150S30CH2/(D)	15
UPF200S24CH2/(D)	15
UPF200S30CH2/(D)	15
UPF250S30CH2/(D)	15

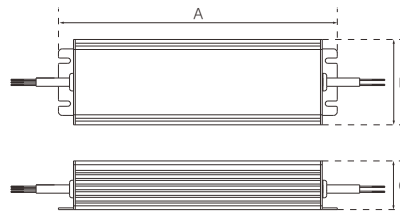

UPF-CH2/(D)

Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	OTP	Approvals	Dimensions [AxBxC]/Weight
UPF20S24CH2/(D)	AC180~264V	24V	0.7A	86%	16.8W	-	KS/KC	174x61.5x36.8/0.67kg
UPF25S30CH2/(D)	AC180~264V	30V	0.7A	86%	21W	-	KS/KC	174x61.5x36.8/0.67kg
UPF50S30CH2/(D)	AC180~264V	30V	1.4A	90%	42W	Built-in	KS/KC	192x55.5x37.3/0.64kg
UPF60S24CH2/(D)	AC180~264V	24V	2.1A/2.5A	89%	48W	Built-in	KS/KC	192x55.5x37.3/0.64kg
UPF75S30CH2/(D)	AC180~264V	30V	2.3A/2.1A	90%	60W	Built-in	KS/KC	192x55.5x37.3/0.64kg
UPF80S24CH2/(D)	AC180~264V	24V	3.0A/2.8A	90%	70W	Built-in	KS/KC	192x55.5x37.3/0.64kg
UPF100S30CH2/(D)	AC180~264V	30V	3.0A	92%	85W	Built-in	KS/KC	224x55.5x37.3/0.77kg
UPF125S24CH2/(D)	AC180~264V	24V	4.8A	91.5%	100W	Built-in	KS/KC	224x55.5x37.3/0.77kg
UPF150S24CH2/(D)	AC180~264V	24V	5.6A	90%	135W	Built-in	KS/KC	231x68x38.8/1.1kg
UPF150S30CH2/(D)	AC180~264V	30V	4.6A/4.2A	92.5%	126W	Built-in	KS/KC	224x55.5x37.3/0.77kg
UPF200S24CH2/(D)	AC180~264V	24V	7.7A	91%	170W	Built-in	KS/KC	241x68x38.8/1.15kg
UPF200S30CH2/(D)	AC180~264V	30V	6.2A	91.5%	170W	Built-in	KS/KC	241x68x38.8/1.15kg
UPF250S30CH2/(D)	AC180~264V	30V	7.0A	92%	210W	Built-in	KS/KC	268.8x76.3x45.2/1.4kg

UPF-CG2/(D)

Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	OTP	Approvals	Dimensions [AxBxC]/Weight
UPF60S20CG2D	AC180~264V	20V	2.8A	89%	50W	Built-in	KS/KC	192x55.5x37.3/0.64kg
UPF150S24CG2D	AC180~264V	24V	5.6A	93%	135W	Built-in	KS/KC	236x61.5x37./0.89kg
UPF200S24CG2/(D)	AC180~264V	24V	7.0A	93%	170W	Built-in	KS/KC	236x61.5x37./0.89kg

Note.

Blank type : IP68 rated / Cable for I/O connection.

Output current level can be adjusted through internal potentiometer.

D type : IP68 rated / Constant current level adjusted through output cable with 1-10Vdc or 10V PWM signal or resistance.

CH2D-EX•CG2D-EX



- Constant current design
- Built-in PFC function
- Protections : Over current/Over voltage/Short circuit /Over temperature(60W~250W)
- Cooling by free air convection
- IP68 design for outdoor installations
- Output voltage and current level can be adjusted through internal potentiometer
- 3 in 1 dimming function(option : D type)
- 100% full load burn-in test
- Suitable for LED lighting and street & tunnel lighting applications
- Metal case
- 5years warranty

- AC input voltage range : 180~264VAC
- Power Factor : 0.95 min.(Condition:60%~100% rated Power)
- Output voltage and current level can be adjusted through internal potentiometer
- Voltage adj. range : $\pm 10\%$ rated output voltage (but,do not use over the rated power)
- Current adj. range : Fixed
- Over current protection : 95~108%(refer to "DRIVING METHODS of LED MODULE")
- Over voltage protection : 115~140% rated output voltage
- Withstanding voltage : I-O : 3.75KVAC,I-FG:2KVAC,O-FG:1.5KVAC,1minute
- Isolation resistance : I-O,I-FG,O-FG : 100 M ohms/500VDC
- Working temperature : -40~+70°C (refer to output derating curve of homepage)
- Safety standards : K61347-1,K61347-2-13
- EMC standards : K00015,K61547

KEY PRODUCT FEATURES



Protections

Over current	Over voltage	Short circuit	Over temp.
✓	✓	✓	✓ 60W~250W

TECHNICAL DATA

W	VAC	VDC
20W~250W	AC180~264V	24V/30V
IP	TA	PFC
IP 68	-40~+70°C	≥ 0.95

WARRANTY




APPROVALS



Model+Bracket Packing

Model+Bracket	Packing
UPF20S24CH2D-EX	15
UPF25S30CH2D-EX	15
UPF50S30CH2D-EX	15
UPF60S24CH2D-EX	15
UPF75S30CH2D-EX	15
UPF80S24CH2D-EX	15
UPF100S30CH2D-EX	15
UPF125S24CH2D-EX	15
UPF150S24CH2D-EX	15
UPF150S30CH2D-EX	15
UPF200S24CH2D-EX	15
UPF200S30CH2D-EX	15
UPF250S30CH2D-EX	15

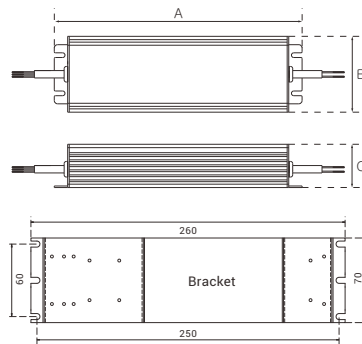

UPF-CH2D-EX

Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	OTP	Approvals	Dimensions [AxBxC]/Weight
UPF20S24CH2D-EX	AC180~264V	24V	0.7A	85%	16.8W	-	KS/KC	174x61.5x36.8/0.67kg
UPF25S30CH2D-EX	AC180~264V	30V	0.7A	84%	21W	-	KS/KC	174x61.5x36.8/0.67kg
UPF50S30CH2D-EX	AC180~264V	30V	1.4A	90%	42W	Built-in	KS/KC	192x55.5x37.3/0.64kg
UPF60S24CH2D-EX	AC180~264V	24V	2.5A	89%	48W	Built-in	KS/KC	192x55.5x37.3/0.64kg
UPF75S30CH2D-EX	AC180~264V	30V	2.1A	90%	60W	Built-in	KS/KC	192x55.5x37.3/0.64kg
UPF80S24CH2D-EX	AC180~264V	24V	2.8A	90%	70W	Built-in	KS/KC	192x55.5x37.3/0.64kg
UPF100S30CH2D-EX	AC180~264V	30V	3.0A	92%	85W	Built-in	KS/KC	224x55.5x37.3/0.77kg
UPF125S24CH2D-EX	AC180~264V	24V	4.8A	91.5%	100W	Built-in	KS/KC	224x55.5x37.3/0.77kg
UPF150S24CH2D-EX	AC180~264V	24V	5.6A	90%	135W	Built-in	KS/KC	231x68x38.8/1.1kg
UPF150S30CH2D-EX	AC180~264V	30V	4.2A	92.5%	126W	Built-in	KS/KC	224x55.5x37.3/0.77kg
UPF200S24CH2D-EX	AC180~264V	24V	7.7A	91%	170W	Built-in	KS/KC	241x68x38.8/1.15kg
UPF200S30CH2D-EX	AC180~264V	30V	6.2A	91.5%	170W	Built-in	KS/KC	241x68x38.8/1.15kg
UPF250S30CH2D-EX	AC180~264V	30V	7.0A	92%	210W	Built-in	KS/KC	268.8x76.3x45.2/1.4kg

UPF-CG2D-EX

Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	OTP	Approvals	Dimensions [AxBxC]/Weight
UPF60S20CG2D-EX	AC180~264V	20V	2.8A	89%	50W	Built-in	KS/KC	192x55.5x37.3/0.64kg
UPF150S24CG2D-EX	AC180~264V	24V	5.6A	93%	135W	Built-in	KS/KC	236x61.5x37.0/0.89kg
UPF200S24CG2D-EX	AC180~264V	24V	7.0A	93%	170W	Built-in	KS/KC	236x61.5x37.0/0.89kg


Note.

Constant current level adjusted through output cable with 1-10Vdc or 10V PWM signal or resistance

Enclosed Switching Power Supply

- Slim & Low Power Consumption Type
- General Type



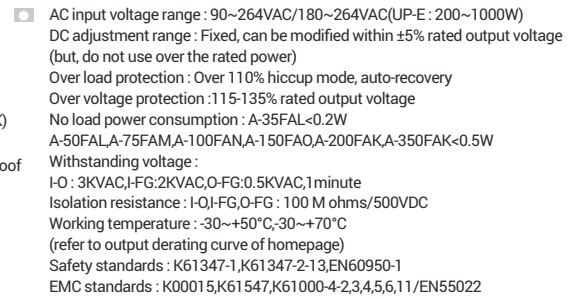

UP-AF·G



- Constant voltage design
- Low cost & slim Type
- Protections : Over load/Over voltage(UP-G only)
/Short circuit
- Cooling by free air convection(Cooling by Fan : 350GF)
- 100% full load burn-in test
- LED display, LED indicator light applications(UP-AF)
- Design for indoor LED lighting and LED sign with waterproof box applications
- 2years warranty


- AC input voltage range : 176~264VAC
- DC adjustment range : Fixed, can be modified within $\pm 5\%$ rated output voltage(but, do not use over the rated power)
- Over load protection : Over 110% hiccup mode, auto-recovery
- Over voltage protection : 115-135% rated output voltage
- Withstanding voltage :
- I-O : 3KVAC, I-FG:1.5KVAC, O-FG:0.5KVAC, 1 minute
- Isolation resistance : I-O, I-FG, O-FG : 100 M ohms/500VDC
- Working temperature : -20~+70°C; -30~+70°C
- (refer to output derating curve of homepage)
- Safety standards : K61347-1, K61347-2-13
- EMC standards : K00015, K61547, K61000-4-2, 3, 4, 5, 6, 11

KEY PRODUCT FEATURES



IEC
61347
(UP-G)

TECHNICAL DATA

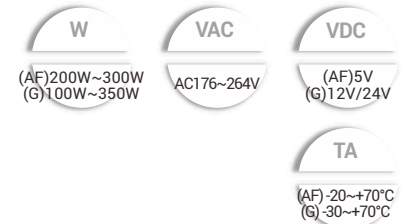

WARRANTY



APPROVALS




(UP-G)

Protections

Over load	Over voltage	Short circuit	Over temp.
✓	✓ UP-G	✓	

Model	Packing
A-200AF-5X	30
A-300AF-5	30
A-100GC-xx	40
A-150GD-xx	40
A-200GD-xx	40
A-350GF-xx	20



UP-AF

Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	Approvals	Dimensions [AxBxC]/Weight
A-200AF-5X	AC176~264V	5V	40A	86%	200W	KC	190x81x30/0.36kg
A-300AF-5	AC176~264V	5V	60A	89%	300W	KC	190x82x30/0.36kg

UP-G

Model No.	Input Voltage	Output Voltage	Output Current	Efficiency	Max. Power	Approvals	Dimensions [AxBxC]/Weight
A-100GC-12	AC176~264V	12V	8.3A	86%	99.6W	KC/CE	129x97x30/0.3kg
A-100GC-24	AC176~264V	24V	4.17A	89%	100W	KC/CE	129x97x30/0.3kg
A-150GD-12	AC176~264V	12V	12.5A	86%	150W	KC/CE	159x97x30/0.38kg
A-150GD-24	AC176~264V	24V	6.25A	87%	150W	KC/CE	159x97x30/0.38kg
A-200GD-12	AC176~264V	12V	16.66A	87%	200W	KC/CE	159x97x30/0.3kg
A-200GD-24	AC176~264V	24V	8.3A	88%	200W	KC/CE	159x97x30/0.3kg
A-350GF-12	AC176~264V	12V	29.2A	85%	350.4W	KC/CE	215x115x30/0.65kg
A-350GF-24	AC176~264V	24V	14.6A	87%	350.4W	KC/CE	215x115x30/0.65kg

UP



- Constant voltage design
- Protections : Over load/Over voltage/Short circuit
- Cooling by free air convection
- (Cooling by Fan : 300~1500W)
- 100% full load burn-in test
- Suitable for indoor LED lighting and industrial applications
- 3years warranty

- AC input voltage range : 85~264VAC(15~100W)
/90~264VAC Selectable by switch(150~850W)/180~264VAC(1000~1500W)
- DC adjustment range : Fixed, can be modified within $\pm 5\%$ rated output voltage (but, do not use over the rated power)
- Over load protection : Over 110% of rating, auto-recovery
- Over voltage protection : 115~140% rated output voltage
- Withstanding voltage:
I-O : 3kVAC, I-FG: 1.5kVAC, O-FG: 0.5kVAC, 1minute
- Isolation resistance : I-O, I-FG, O-FG : 100 M ohms/500VDC
- Working temperature : -10~+60°C (refer to output derating curve of homepage)
- Safety standards : K61347-1, K61347-2-13, EN61347-1, EN61347-2-13
- EMC standards : K00015, K61547/EN61000-3-2,3, EN61204-3, EN55022

KEY PRODUCT FEATURES

IEC
61347

TECHNICAL DATA

W
15W~1500WVAC
AC85~264V
AC180~264VVDC
5V/9V/12V
15V/24VTA
-10~+60°C

WARRANTY

3
Years

APPROVALS




Protections

Over load Over voltage Short circuit Over temp.

✓ ✓ ✓

Model	Packing
UP15Sxx	100
UP30Sxx	80
UP50Sxx	70
UP75Sxx	50
UP100Sxx	50
UP150Sxx	20
UP200Sxx	20
UP220Sxx	20
UP300Sxx	20
UP400Sxx	15
UP500Sxx	8
UP600Sxx	8
UP750Sxx	5
UP850Sxx	5
UP1000Sxx	5
UP1200Sxx	3
UP1500Sxx	3



Model No.	Input Voltage	Output Voltage	Output Current	Max. Power	Approvals	Dimensions [AxBxC]/Weight
UP15S05	AC85~264V	5V	3A	15W	KC/CE/CB	97.5x64x32/0.23kg
UP15S12	AC85~264V	12V	1.2A	15W	KC/CE/CB	97.5x64x32/0.23kg
UP15S15	AC85~264V	15V	1A	15W	KC/CE/CB	97.5x64x32/0.23kg
UP15S24	AC85~264V	24V	0.6A	15W	KC/CE/CB	97.5x64x32/0.23kg
UP30S05	AC85~264V	5V	6A	30W	KC/CE/CB	98x79x37/0.26kg
UP30S12	AC85~264V	12V	2.5A	30W	KC/CE/CB	98x79x37/0.26kg
UP30S15	AC85~264V	15V	2A	30W	KC/CE/CB	98x79x37/0.26kg
UP30S24	AC85~264V	24V	1.2A	30W	KC/CE/CB	98x79x37/0.26kg
UP50S05	AC85~264V	5V	10A	50W	KC/CE/CB	125x83x40/0.31kg
UP50S12	AC85~264V	12V	4.1A	50W	KC/CE/CB	125x83x40/0.31kg
UP50S15	AC85~264V	15V	3.3A	50W	KC/CE/CB	125x83x40/0.31kg
UP50S24	AC85~264V	24V	2A	50W	KC/CE/CB	125x83x40/0.31kg
UP75S05	AC85~264V	5V	15A	75W	KC/CE/CB	135x96x40/0.41kg
UP75S12	AC85~264V	12V	6.2A	75W	KC/CE/CB	135x96x40/0.41kg
UP75S15	AC85~264V	15V	5A	75W	KC/CE/CB	135x96x40/0.41kg
UP75S24	AC85~264V	24V	3.1A	75W	KC/CE/CB	135x96x40/0.41kg
UP100S12	AC85~264V	12V	8.3A	100W	KC/CE/CB	135x96x40/0.41kg
UP100S15	AC85~264V	15V	6.6A	100W	KC/CE/CB	135x96x40/0.41kg
UP100S24	AC85~264V	24V	4.1A	100W	KC/CE/CB	135x96x40/0.41kg
UP150S05	AC90~132V/AC180~264V	5V	30A	150W	KC/CE/CB	207x105x46/0.85kg
UP150S12	AC90~132V/AC180~264V	12V	12.5A	150W	KC/CE/CB	207x105x46/0.85kg
UP150S15	AC90~132V/AC180~264V	15V	10A	150W	KC/CE/CB	207x105x46/0.85kg
UP150S24	AC90~132V/AC180~264V	24V	6.2A	150W	KC/CE/CB	207x105x46/0.85kg
UP200S12	AC90~132V/AC180~264V	12V	16.6A	200W	KC/CE/CB	231x114x50/0.9kg
UP200S15	AC90~132V/AC180~264V	15V	13.3A	200W	KC/CE/CB	231x114x50/0.9kg
UP200S24	AC90~132V/AC180~264V	24V	8.3A	200W	KC/CE/CB	231x114x50/0.9kg
UP220S12	AC90~132V/AC180~264V	12V	18.3A	220W	KC/CE/CB	231x114x50/0.9kg
UP220S15	AC90~132V/AC180~264V	15V	14.6A	220W	KC/CE/CB	231x114x50/0.9kg
UP220S24	AC90~132V/AC180~264V	24V	9.1A	220W	KC/CE/CB	231x114x50/0.9kg
UP300S12	AC90~132V/AC180~264V	12V	25A	300W	KC/CE/CB	231x114x50/0.95kg
UP300S24	AC90~132V/AC180~264V	24V	12.5A	300W	KC/CE/CB	231x114x50/0.95kg
UP400S12	AC90~132V/AC180~264V	12V	33.3A	400W	KC/CE/CB	231x114x70/1.2kg
UP400S24	AC90~132V/AC180~264V	24V	16.6A	400W	KC/CE/CB	231x114x70/1.2kg
UP500S12	AC90~132V/AC180~264V	12V	41.6A	500W	KC/CE/CB	254x146x70.6/2kg
UP500S24	AC90~132V/AC180~264V	24V	20.8A	500W	KC/CE/CB	254x146x70.6/2kg
UP600S12	AC90~132V/AC180~264V	12V	50A	600W	KC/CE/CB	254x146x70.6/2kg
UP600S24	AC90~132V/AC180~264V	24V	25A	600W	KC/CE/CB	254x146x70.6/2kg
UP750S12	AC90~132V/AC180~264V	12V	6.25A	750W	KC/CE/CB	285x170x85/2.8kg
UP750S24	AC90~132V/AC180~264V	24V	31.2A	750W	KC/CE/CB	285x170x85/2.8kg
UP850S12	AC90~132V/AC180~264V	12V	70.8A	850W	KC/CE/CB	285x170x85/2.8kg
UP850S24	AC90~132V/AC180~264V	24V	35.4A	850W	KC/CE/CB	285x170x85/2.8kg
UP1000S12	AC180~264V	12V	83.3A	1000W	KC/CE/CB	350x153x80/3.5kg
UP1000S24	AC180~264V	24V	41.6A	1000W	KC/CE/CB	350x153x80/3.5kg
UP1200S24	AC180~264V	24V	50A	1200W	KC/CE/CB	376x200x105/5.2kg
UP1500S24	AC180~264V	24V	62.5A	1500W	KC/CE/CB	376x200x105/5.2kg

Din-rail Power supply



UP-R 50~240W Single output

- Constant voltage design
- Built in PFC(240W)
- Protections : Over load/Over voltage/Short circuit
- Cooling by free air convention
- Din-rail installations
- LED indicator for power on
- 100% full load burn-in test
- Suitable for industrial applications
- 3years warranty

Open Frame Switching Power supply



UP-N 15~150W Single output

- Constant voltage design
- Non-cover type
- Protections : Over load/Over voltage/Short circuit
- Suitable for industrial applications
- 3years warranty

Solid State Relay



DC-Output Type	30~40A DC Input/DC Output
1Phase Type	2~50A DC or AC Input/AC-Output
2,3 Phase Type	15~50A DC or AC Input/AC-Output

- Normally open
- Built-in LED indicator
- Suitable for industrial applications
- 3years warranty

Noise Filter



1Phase Type	3~400A
3 Phase Type	10~1000A

- Excellent filtering for normal mode and common mode noise
- Low leakage
- Suitable for industrial & medical equipment, OA,FA applications
- 3years warranty

DREAMS
come
TRUE
with US

102-12FL, Chunui Techno park1, 36, Bucheon-Ro 198 beon-gil,
Bucheon-si, Gyeonggi-do, 14557, Rep. of Korea

Tel. +82-32-668-9560~4

Fax. +82-32-668-9565

www.unionelecom.co.kr

